


Technical data

NKXR30T2Z

Combined bearings

Visual(s)

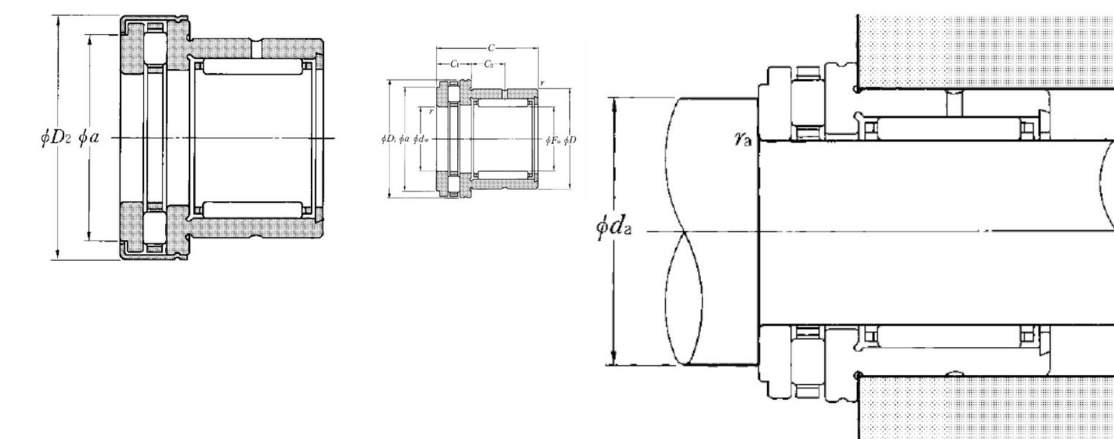

Product definition

Fw	30 mm
dw	30 mm
D	42 mm
D2	48 mm
C	30 mm
C1	11 mm
C2	9.5 mm
a	42.7 mm
rs min	0.6 mm
Dw	2.5 mm
Dw1	5 mm
Lw	15.8 mm
Lubrication hole on outer ring	Oui/Yes
Precision class	P0
Mass	0.17 kg
Brand	NTN

Product performance

Cr	22.3 kN
Ca	27.8 kN
C0r	39.5 kN
C0a	72.5 kN
Nlim (grease)	1,500 Tr/min
Nlim (oil)	6,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	44 mm
ras max	0.6 mm