



Technical data

ESEHE206


Bearing units

Grey cast housing, radial insert ball bearing with eccentric locking collar, single lip seal

KIT CONTENT

ES206G2, EHE206

VISUAL (S)

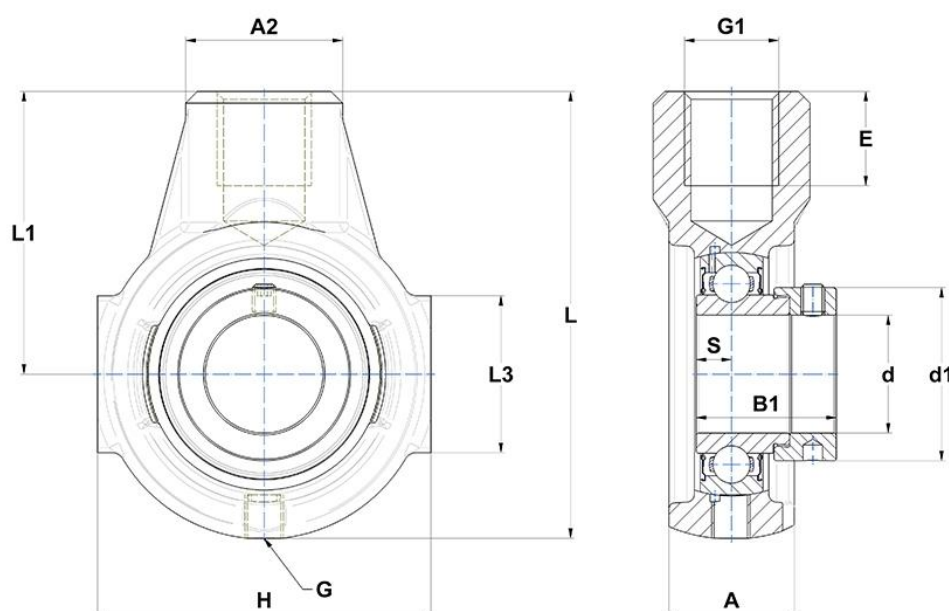

PRODUCT DEFINITION

A - Housing width	32 mm
A2 - Width over loc. slot flange(T/ST)/width at mount. hole(EHE)	40 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	35,7 mm
d - Shaft diameter	30 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	44,1 mm
E - Mounting hole thread depth	24 mm

PRODUCT DEFINITION	
G - Grease fitting	R1/8"
G1 - Thread size	M24
H - Housing length, width or diameter	85 mm
L - Housing length	114 mm
L1 - Distance attachment end face to bearing centerline	72 mm
L3 - Length of guidance slot/face	40 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	9 mm
Brand	SNR

PRODUCT PERFORMANCE	
C - Dynamic load rating	19,5 kN
C0 - Static load rating	11,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES	
Mass	1,03 kg