




Technical datasheet

NU.410

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

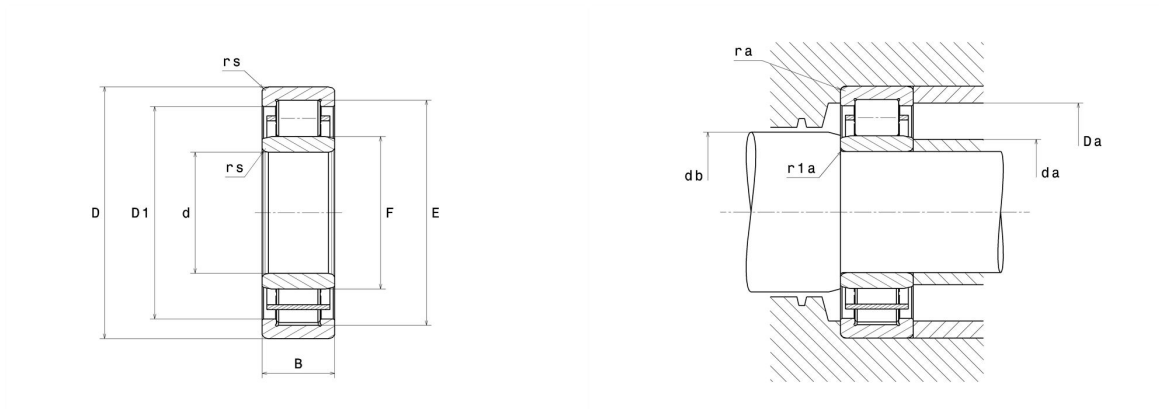

Product definition

d	50 mm
D	130 mm
B	31 mm
E	110.8 mm
F	70.8 mm
D1	104.3 mm
rs min	2.1 mm
r1s min	2.1 mm
Radial clearance class	CN
Mass (without HJ ring)	2 kg
Brand	SNR

Product performance

Dynamic load, C	130 kN
Static load, C0	125 kN
Fatigue limit load, Cu	15.2 kN
Nref	5,700 rpm
Nlim	6,800 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.32 Hz
Characteristic outer ring frequency, BPF0	3.9 Hz
Characteristic inner ring frequency, BPFI	6.1 Hz

Abutment dimensions

da min	61 mm
da max	69 mm
Da max	119 mm
ra max	2 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$