



Technical data

UCPA.208


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC.208.G2, PA208

VISUAL (S)

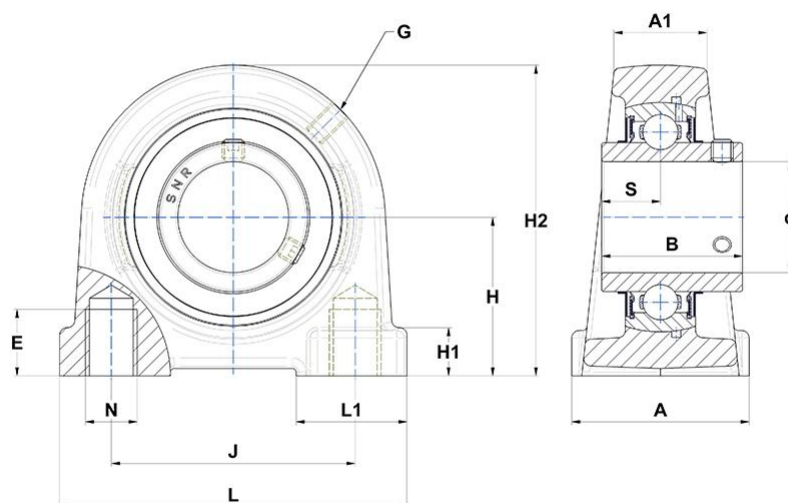

PRODUCT DEFINITION

A - Housing width	54 mm
A1 - Housing top width	28 mm
B - Width of Inner Ring	49,2 mm
d - Shaft diameter	40 mm
E - Mounting hole thread depth	20 mm
G - Grease fitting	M6x1

PRODUCT DEFINITION

H - Distance mounting base to centerline spheric. seating diam.	49,2 mm
H1 - Housing foot height	13 mm
H2 - Housing height	100 mm
J - Mounting holes distance	84 mm
L - Housing length	116 mm
L1 - Housing foot length	32 mm
N - Mounting hole dimension	M14
S - Dist. cent. of raceway to face IR on side opp. lock. device	19 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	29,6 kN
C0 - Static load rating	18,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,74 kg
Recommended tightening torque for set screw	11.5 N-m