


TORQUE ANGLE INDICATOR 8200

- When using torque angle indicator no. 8200, please note:
The maximum output of the torque wrenches must not be passed.
Please ensure that the maximum load capacity of the square drive including the values achieved by angle-regulated tightening is not exceeded:
- 1/2" max. approx. 390 Nm
- 3/4" max. approx. 1330 Nm



8200
Torque angle indicator

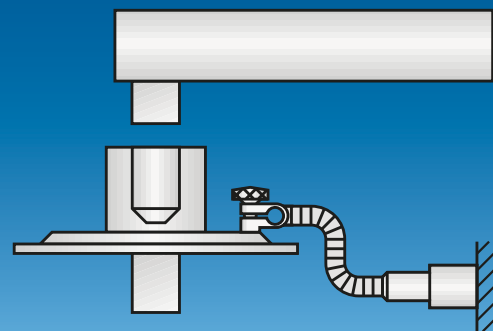

- › Torque-angle tightening
- › Separate angle of rotation gauges with 1/2" or 3/4" square drive
- › For additional precise angle tightening (0-360°)
- › No. 8200-01/-02 with sliding claw and magnetic arm

- › No. 8200-11 only with magnetic arm
- › To operate with a suitable torque wrench
- › The maximum load of the torque wrench must not be exceeded

Code	No.	 "	 "	 mm		
1195980	8200-01	1/2"	1/2"	80	0-360°	0,33
7718480	8200-11	1/2"	1/2"	82	0-360°	0,33
7716510	8200-02	3/4"	3/4"	120	0-360°	0,53

8791 (MM)
Open end fitting
16 Z
metric



- › For solving difficult assembly problems
- › Journal holder diameter 16 mm

Code	No.	 mm	Ø	mm 	 mm	Depth gauge	
7774470	8791-07	7	16	5	20,5	32,0	0,100
7774550	8791-08	8	16	5	20,5	32,0	0,097
7774630	8791-09	9	16	5	20,5	32,0	0,098
7710070	8791-10	10	16	7	29	32,0	0,106
7710150	8791-11	11	16	7	29	32,0	0,106
7676890	8791-12	12	16	7	29	32,0	0,106
7710230	8791-13	13	16	8	34,5	32,0	0,106
7710310	8791-14	14	16	8	34,5	32,0	0,106
7710580	8791-15	15	16	8	34,5	32,0	0,116
7710660	8791-16	16	16	9	41,5	32,0	0,141
7710740	8791-17	17	16	9	41,5	32,0	0,141
7676970	8791-18	18	16	9	41,5	32,0	0,148
7710820	8791-19	19	16	10	45	32,0	0,157
7710900	8791-20	20	16	10	45	32,0	0,157
7677000	8791-21	21	16	10	45	32,0	0,180
7711040	8791-22	22	16	11	56	32,0	0,212
1977164	8791-23	23	16	11	56	32,0	0,216
7711120	8791-24	24	16	11	56	32,0	0,216
1552279	8791-25	25	16	11	56	32,0	0,220
1552287	8791-26	26	16	11	56	32,0	0,220
7711200	8791-27	27	16	12	60,5	32,0	0,220
1207008	8791-28	28	16	12	68	32,0	0,300
1552309	8791-29	29	16	12	68	32,0	0,300
7774710	8791-30	30	16	12	68	32,0	0,220
7774980	8791-32	32	16	12	68	32,0	0,220
1552317	8791-36	36	16	12	68	32,0	0,300