
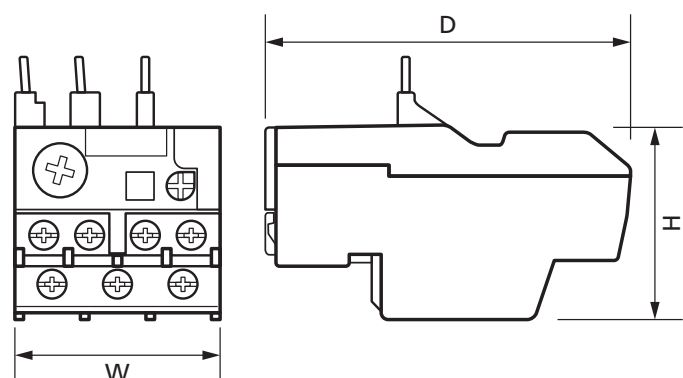


4 to 6A Thermal Overload Relay

Product Ref: **DL2-6**

Technical Features:

- Manual/automatic reset
- Red stop plunger
- Adjustable overload range
- 1NO and 1NC auxiliary as standard
- Suitable for direct mounting onto contactor

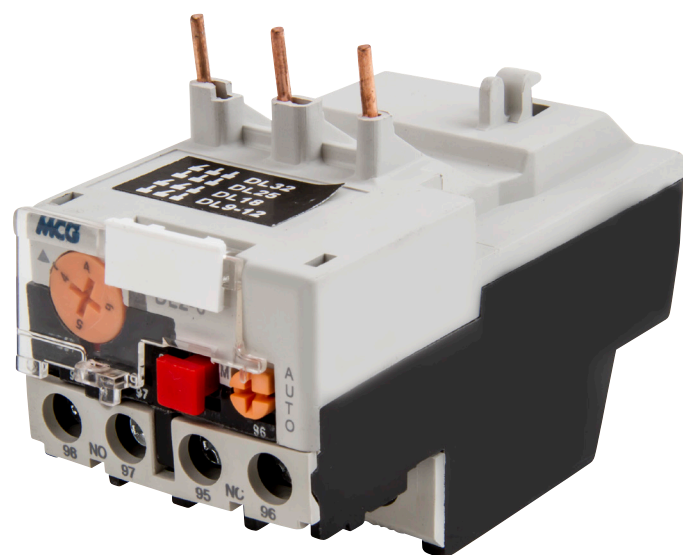

Product Specification

Weight	0.158kg
Frequency	50/60Hz
Mounting	Contactator/Optional Mounting Bracket
Overload Rating	4 - 6A
Colour	Black/Grey
Material	Metal/Plastic
Compliance	UKCA, CE
Guarantee	1 Year
Standards	IEC/EN 60947-4-1
Suitable for	DL Range of Contactors
Depth	90mm
Height	47mm
Width	44mm

Errors and omissions excepted (E&OE). All information is subject to change without notice and is correct at the time of print. Refer to issue number and date below.

Tel: +44 (0)1302 342 642 • mcg.co.uk • [@mcg_industrial](https://twitter.com/mcg_industrial)