



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKT206 - HE2306, UKT 200 Take-Up Mounted Bearings - Adapter Sleeve Locking

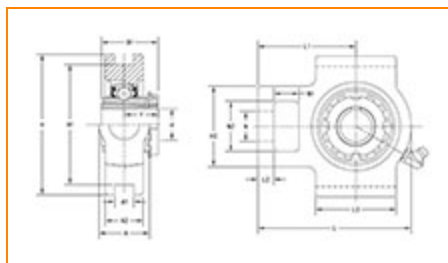

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK206 - HE2306
Adapter Sleeve Number¹	HE2306
Locking Style	Adapter Sleeve Locking
Housing Construction	Take-Up

Dimensions

Housing Width A	37 mm
Slot Width A1	12 mm
Socket Width A2	28 mm
Total Height H	102 mm





Pitch Height H1	89 mm
Height H2	56 mm
Total Length L	113 mm
Shaft Length L1	70 mm
Dimension L2	10 mm
Slot Length L3	57 mm
Adjustment Screw Bore N	22 mm
Opening Width N1	16 mm
Opening Height N2	37 mm
Center of Bearing from End Y	21.5 mm
Dimension B1	38 mm
Grease Nipple Size	B-1/4-2B UNF

Basic Load Ratings

Static Load Rating	11300 N
Dynamic Load Rating	19500 N

¹ Purchase the Adapter Sleeve separately

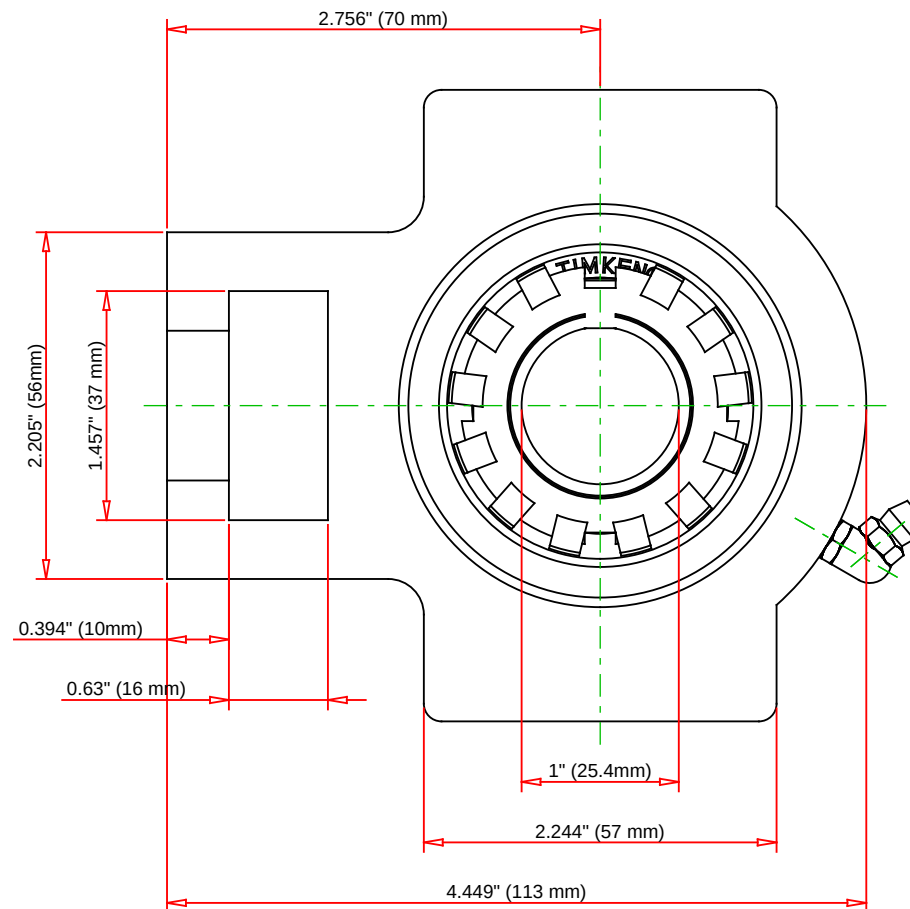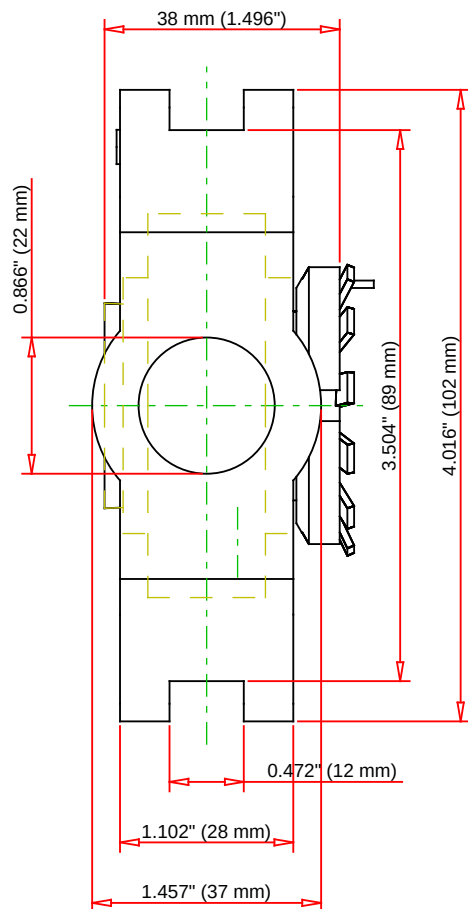

Note: Adapter sold separately

Bearing Number	UK206 - HE2306			
Load Ratings - C _r	4384	lbf	19500	N
Load Ratings - C _{0r}	2540	lbf	11300	N
Weight	2.9	lb	1.3	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKT206 - HE2306
UKT 200 Take-Up Mounted Bearings -
Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY