



Technical data

ESPFL204


Bearing units

Sheet metal housing, radial insert ball bearing with eccentric locking collar, single lip seal

KIT CONTENT

ES204G2, PFL204

VISUAL (S)

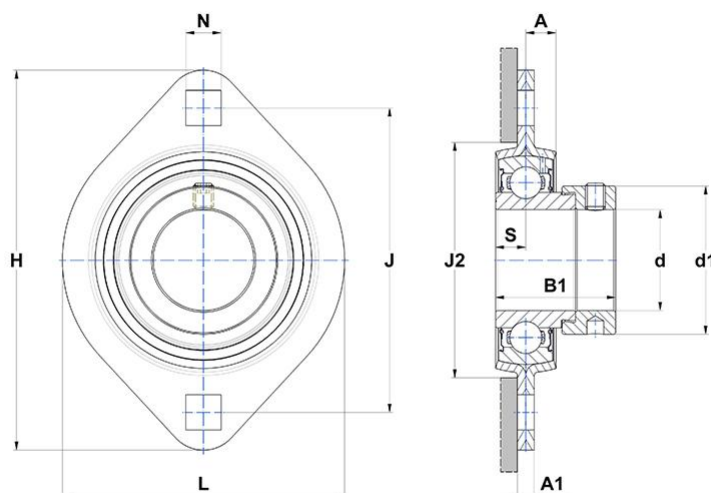

PRODUCT DEFINITION

A - Housing height	7,7 mm
A1 - Housing foot height / flange height	4,5 mm
A2 - Total height from mounting surface	23,4 mm
B - Width of Inner Ring	21,4 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	30,9 mm
d - Shaft diameter	20 mm

PRODUCT DEFINITION

d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	32,4 mm
H - Housing length, width or diameter	91 mm
J - Mounting holes distance	71,5 mm
L - Housing width / diameter	68 mm
N - Mounting hole dimension	9 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	7,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	12,8 kN
C0 - Static load rating	6,65 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,25 kg
Recommended tightening torque for set screw	5.5 N-m