


Data sheet



Time / Immersion & General Purpose Time Switches

NTT02 – 24 Hour General Purpose Timeswitch

Product Image & Line Diagram

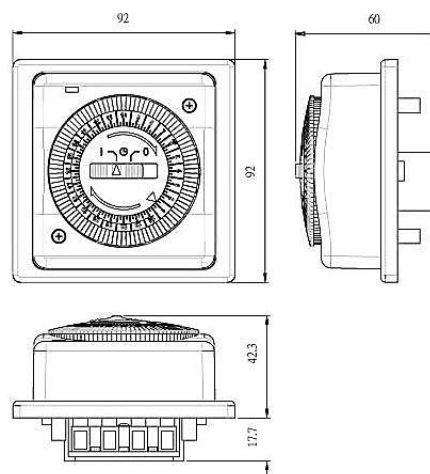

Technical Data

General	
Operating Voltage	230V AC
Frequency	50Hz
Installation Type	Surface or recessed
Min Depth of Wall Box	32mm, Single gang back box or pattress
Contact Type	Normally open
Class Protection	Class 2
Program	24 Hour daily program (98 segments, 48 ON, 48 OFF)
Number of Channels	1
Switch Rating	16A Resistive, 8A Inductive. 1 HP. 750W Incandescent/ Halogen/Fluorescent, 100W CFL lighting.
LED Indicators	Power
Advance Function	Permanent ON/OFF or timed only
Operating Temperature	0°C to 40°C
Accessories (Included)	Instructions, Fittings
Accessories (Optional)	None
Dimensions	Height 92mm, Width 92mm, Depth 60mm
Construction	Casing: Polycarbonate
Weight	157g
EAN	5012483012307
Designed In Accordance To	BS EN 60730-2-7 Includes updates and amendments.
Guarantee Period	3 Years



A theben Group Company

Article Number: NTT02 DS230715V1



Timeguard Ltd reserves the right to withdraw, improve or modify any design without prior notification. Timeguard Ltd cannot be held responsible for the incorrect application of any product.
Additional information can be found at: www.timeguard.com