




Technical data

EX207G2

Insert bearings

Spherical outer diameter, fixing by eccentric locking collar, seal with slinger

VISUAL (S)

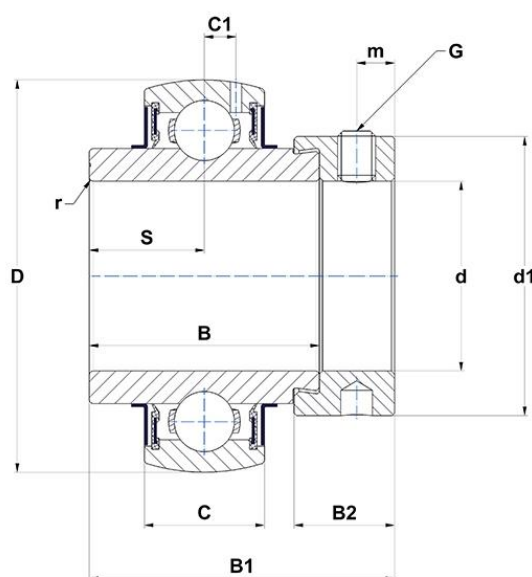

PRODUCT DEFINITION

B - Width of Inner Ring	37,6 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	51,1 mm
B2 - Width of eccent. Lock. collar/nut+washer of adapter sleeve	17,5 mm
C - Width of Outer Ring	20 mm
C1 - Distance center of OR to center of lubrication zone	5,8 mm
d - Shaft diameter	35 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	51,1 mm
D - Outer diameter of OR	72 mm

PRODUCT DEFINITION

G - Set screw size	M8x1
m - Distance to set screw	6,5 mm
r - Radius Inner Ring	1.1
S - Dist. cent. of raceway to face IR on side opp. lock. device	18,8 mm
SW - Wrench size	4 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,6 kg
Recommended tightening torque for set screw	11.5 N-m