




Technical datasheet

NJ2312ET2XC4

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, polyamide cage.

Visual(s)

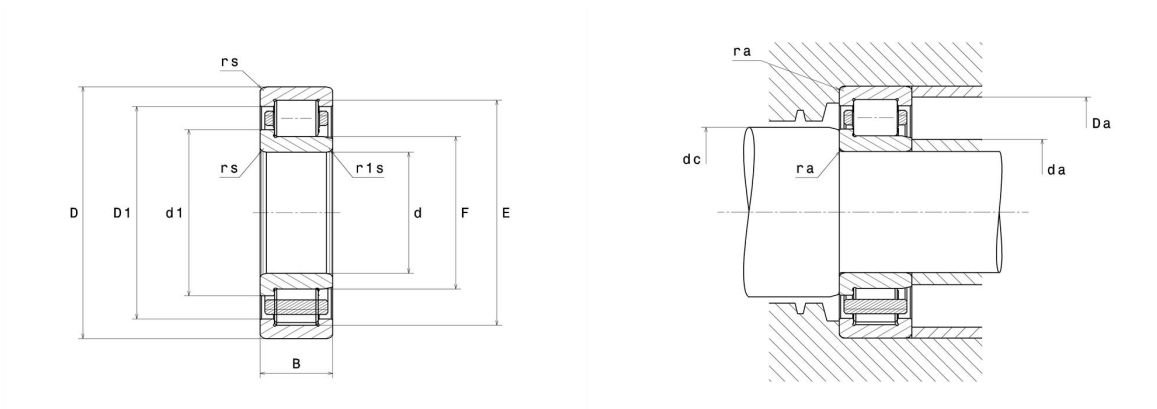

Product definition

d	60 mm
D	130 mm
B	46 mm
E	115 mm
F	77 mm
d1	84.6 mm
rs min	2.1 mm
r1s min	2.1 mm
Radial clearance class	C4
Mass (without HJ ring)	2.95 kg
Brand	NTN

Product performance

Dynamic load, C	222 kN
Static load, C0	262 kN
Fatigue limit load, Cu	32 kN
Nlim (oil)	5,200 rpm
Nlim (grease)	4,400 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.86 Hz
Characteristic outer ring frequency, BPF0	5.21 Hz
Characteristic inner ring frequency, BPFI	7.79 Hz

Abutment dimensions

da min	71 mm
da max	75 mm
dc min	86 mm
Da max	119 mm
ra max	2 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$