



Technical data

USPP201


Bearing units

Sheet metal housing, radial insert ball bearing with socket set screws, single lip seal

KIT CONTENT

US201G2, PP203

VISUAL (S)

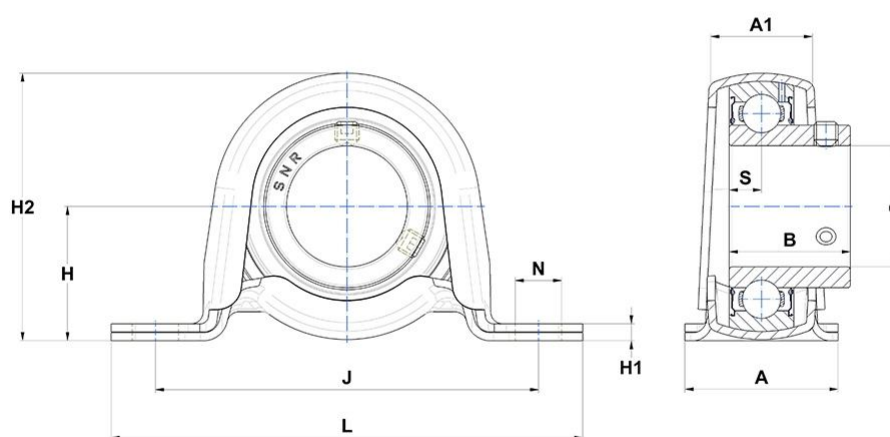

PRODUCT DEFINITION

A - Housing width	25,4 mm
A1 - Housing top width	15,9 mm
B - Width of Inner Ring	22 mm
d - Shaft diameter	12 mm
H - Distance mounting base to centerline spheric. seating diam.	22,2 mm
H1 - Housing foot height	2,4 mm

PRODUCT DEFINITION

H2 - Housing height	43,2 mm
J - Mounting holes distance	68 mm
L - Housing length	85,7 mm
N - Mounting hole dimension	9 mm
S - Dist. cent. of raceway to face IR on side opp. lock. device	6 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	9,55 kN
C0 - Static load rating	4,78 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	0,15 kg
Recommended tightening torque for set screw	3.5 N-m