



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKT208 - HE2308, UKT 200 Take-Up Mounted Bearings - Adapter Sleeve Locking

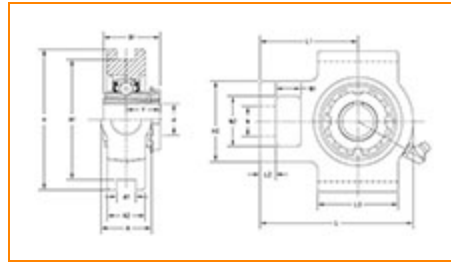

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK208 - HE2308
Shaft Size d	1.2500 in
Adapter Sleeve Number¹	HE2308
Locking Style	Adapter Sleeve Locking
Housing Construction	Take-Up

Dimensions

Housing Width A	49 mm 1.929 in
 Not Width A1	16 mm 0.63 in



Socket Width A2	33 mm 1.299 in
Total Height H	114 mm 4.488 in
Pitch Height H1	102 mm
Height H2	83 mm
Total Length L	144 mm 5.669 in
Shaft Length L1	88 mm 3.465 in
Dimension L2	16 mm
Slot Length L3	83 mm 3.268 in
Adjustment Screw Bore N	29 mm 1.142 in
Opening Width N1	19 mm 0.748 in
Opening Height N2	49 mm 1.929 in
Center of Bearing from End Y	27 mm 1.063 in
Dimension B1	46 mm 1.8110 in
Grease Nipple Size	B-1/4-2B UNF

Basic Load Ratings


Static Load Rating	17800 N 4002 lbf
---------------------------	---------------------

Dynamic Load Rating	29100 N 6542 lbf
----------------------------	---------------------

¹ Purchase the Adapter Sleeve separately

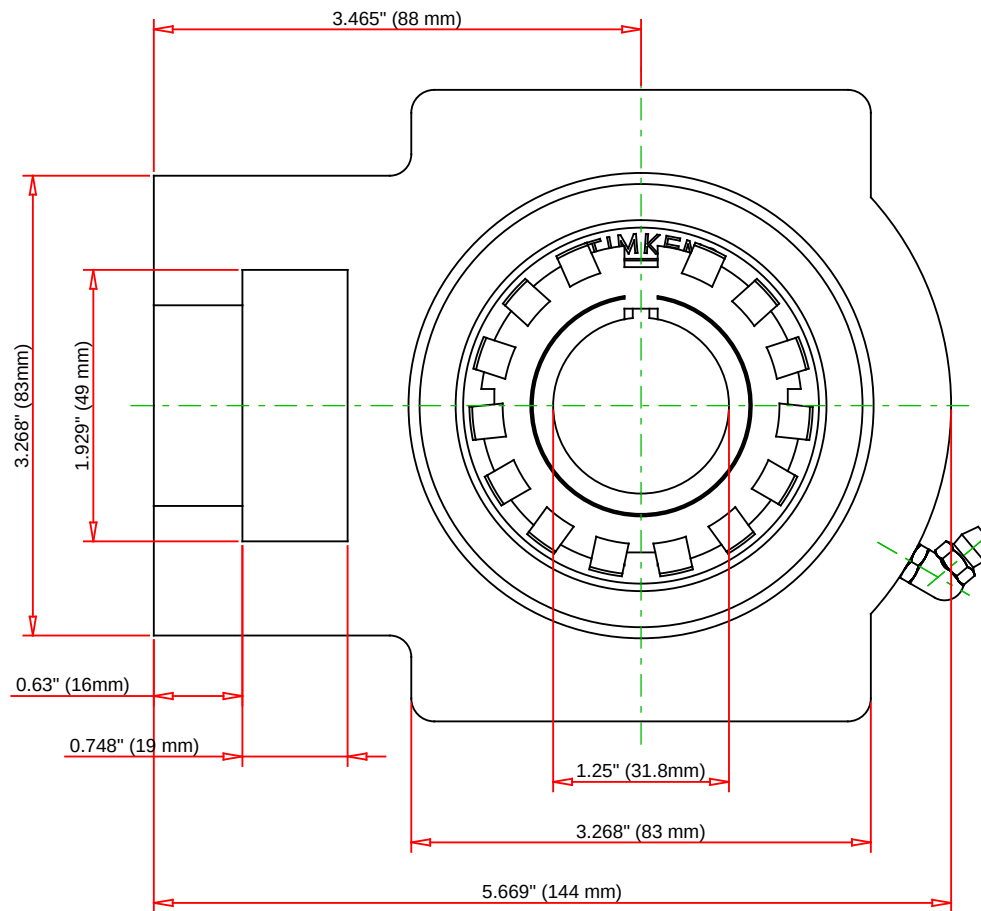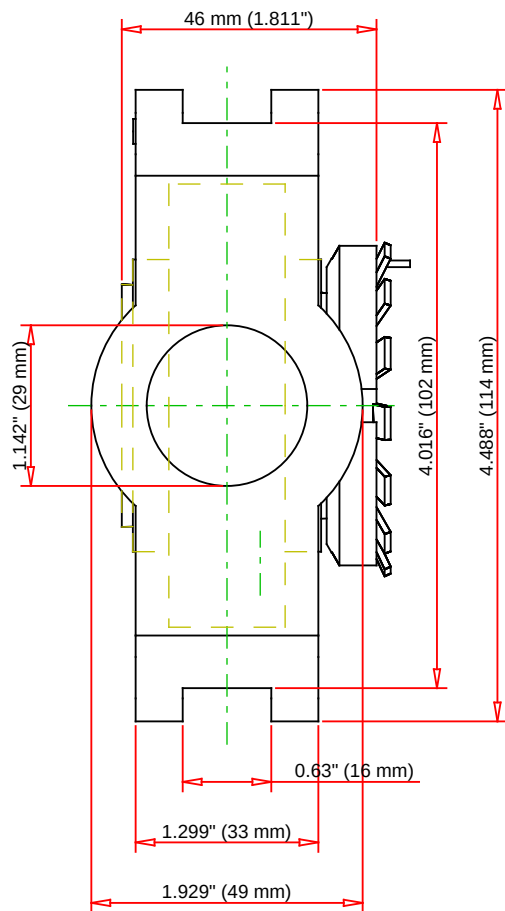

Note: Adapter sold separately

Bearing Number	UK208 - HE2308				
Load Ratings - C _r	6542	lbf	29100		N
Load Ratings - C _{0r}	4002	lbf	17800		N
Weight	5.5	lb	2.5	kg	THE TIMKEN COMPANY NORTH CANTON, OHIO USA

UKT208 - HE2308

UKT 200 Take-Up Mounted Bearings - Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY