


Technical data

NKXR40T2Z

Combined bearings

Visual(s)

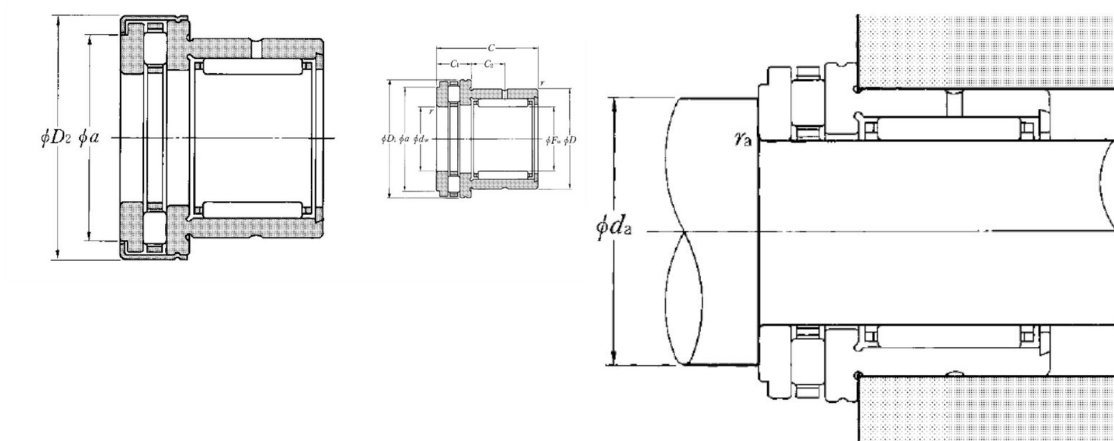

Product definition

Fw	40 mm
dw	40 mm
D	52 mm
D2	61 mm
C	32 mm
C1	13 mm
C2	10 mm
a	55.7 mm
rs min	0.6 mm
Dw	2.5 mm
Dw1	6 mm
Lw	15.3 mm
Lubrication hole on outer ring	Oui/Yes
Precision class	P0
Mass	0.24 kg
Brand	NTN

Product performance	
Cr	25.9 kN
Ca	43 kN
C0r	52.5 kN
C0a	121 kN
Nlim (grease)	1,200 Tr/min
Nlim (oil)	4,800 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions	
da min	56 mm
ras max	0.6 mm