



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKT209 - HE2309, UKT 200 Take-Up Mounted Bearings - Adapter Sleeve Locking

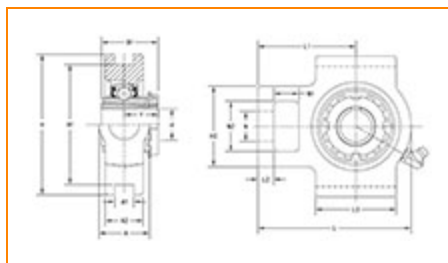

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK209 - HE2309
Adapter Sleeve Number¹	HE2309
Locking Style	Adapter Sleeve Locking
Housing Construction	Take-Up

Dimensions

Housing Width A	49 mm
Slot Width A1	16 mm
Socket Width A2	35 mm
Total Height H	117 mm





Pitch Height H1	102 mm
Height H2	83 mm
Total Length L	144 mm
Shaft Length L1	87 mm
Dimension L2	16 mm
Slot Length L3	83 mm
Adjustment Screw Bore N	29 mm
Opening Width N1	19 mm
Opening Height N2	49 mm
Center of Bearing from End Y	29 mm
Dimension B1	50 mm
Grease Nipple Size	B-1/4-2B UNF

Basic Load Ratings

Static Load Rating	21300 N
Dynamic Load Rating	34100 N

¹ Purchase the Adapter Sleeve separately

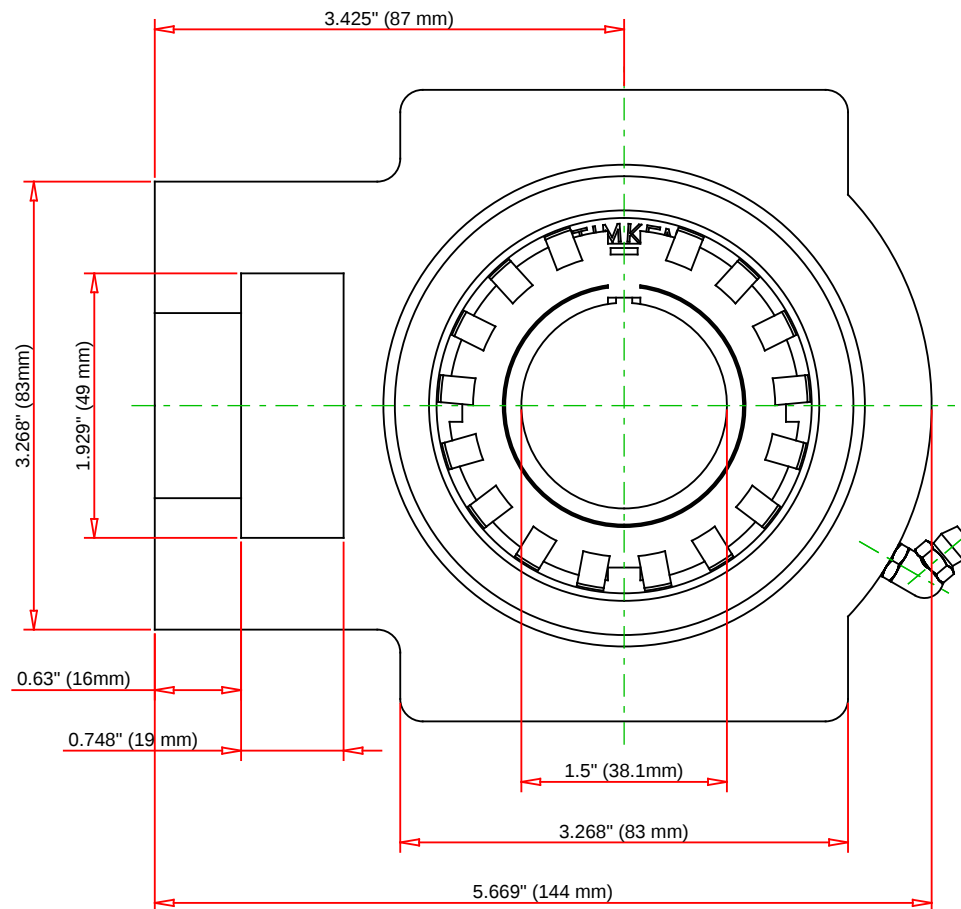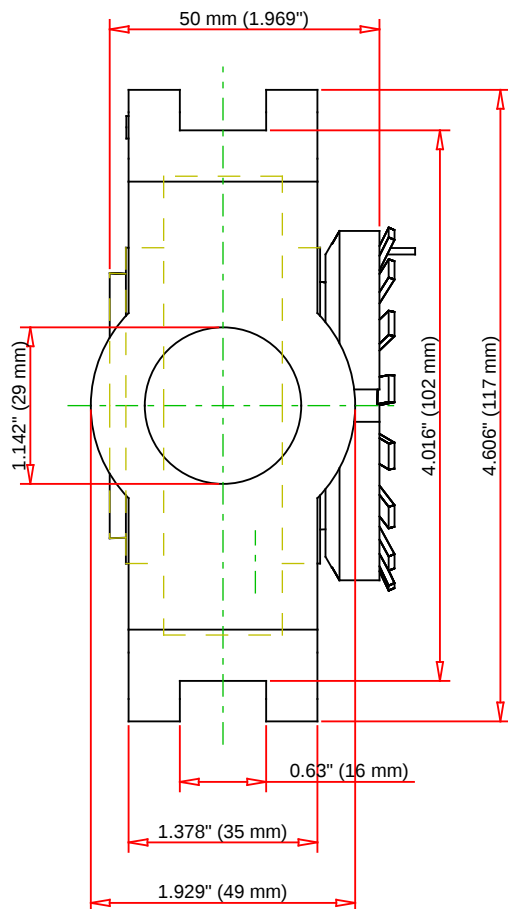

Note: Adapter sold separately

Bearing Number	UK209 - HE2309			
Load Ratings - C _r	7666	lbf	34100	N
Load Ratings - C _{0r}	4788	lbf	21300	N
Weight	5.5	lb	2.5	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKT209 - HE2309
UKT 200 Take-Up Mounted Bearings -
Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY