

Reservoir, Series NL4-CLS, NL6-CLS

- For filter - filter pressure regulator
- Material Polycarbonate Die cast zinc



Version	Reservoir
Certificates	suitable for ATEX
Working pressure min./max.	22 ... 232 psi
Ambient temperature min./max.	14 ... 140 °F
Medium temperature min./max.	14 ... 140 °F
Medium	Compressed air
Filter reservoir volume	1.69 fl.oz.
Weight	See table below

Technical data

Part No.	Condensate drain	Reservoir	Weight
1827009337	semi-automatic, open without pressure	Polycarbonate	0.375 lbs
1827009343	semi-automatic, open without pressure	Die cast zinc, with window	1.21 lbs
1827009338	fully automatic, open without pressure	Polycarbonate	0.441 lbs
1827009344	fully automatic, open without pressure	Die cast zinc, with window	1.23 lbs

Part No.	Fig.
1827009337	Fig. 1
1827009343	Fig. 2
1827009338	Fig. 3
1827009344	Fig. 4


Suitable for use in Ex zones 1, 2, 21, 22.

Technical information


Material	
Reservoir	Polycarbonate Die cast zinc
Seal	Acrylonitrile butadiene rubber

Dimensions


Dimensions, Fig. 1

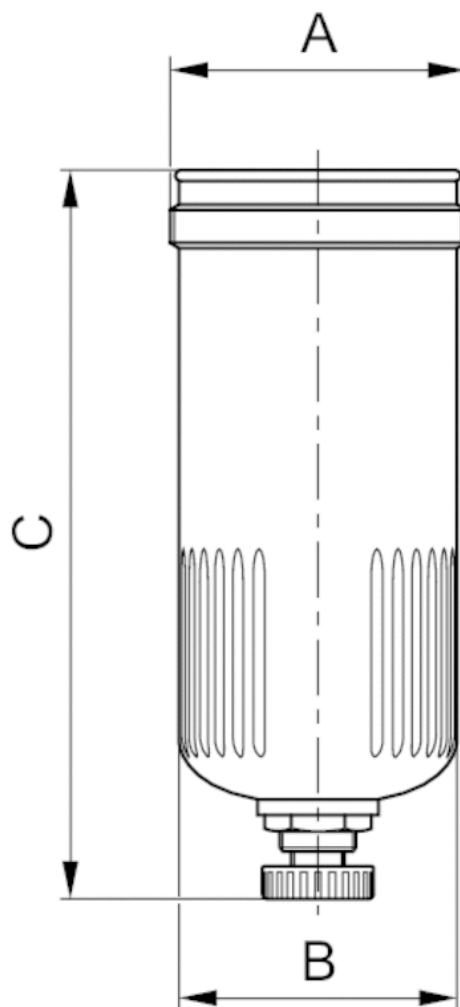


Dimensions, Fig. 2

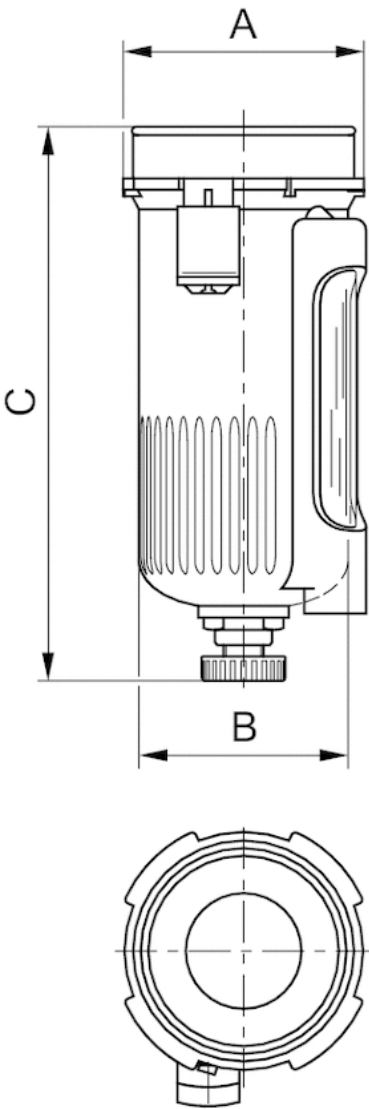

Dimensions, Fig. 3

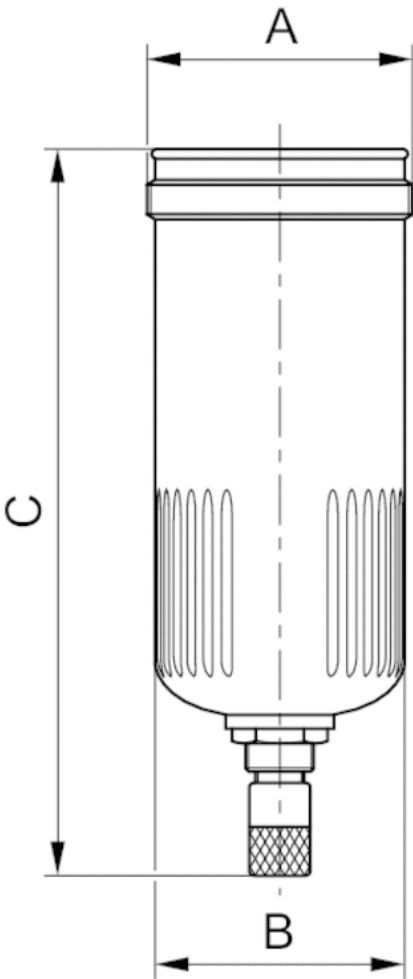

Dimensions, Fig. 4

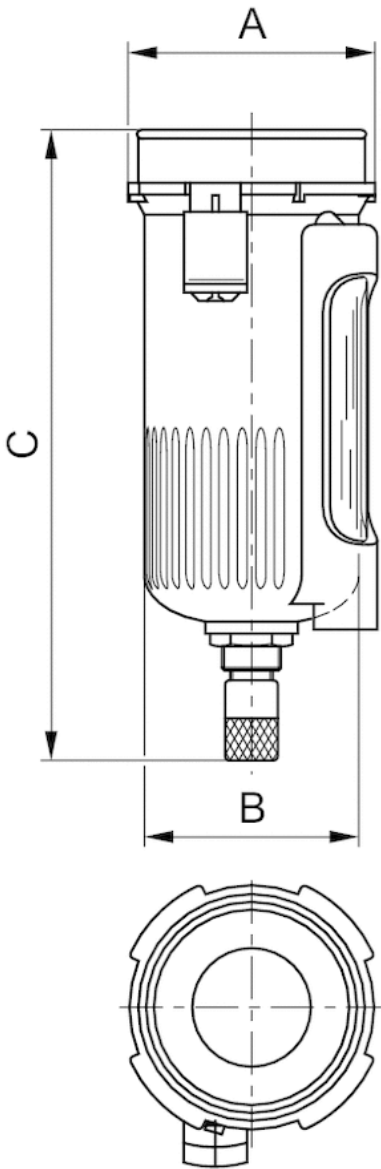

Dimensions in mm

Part No.	A	B	C
1827009337	M56x1,5	53.5	132
1827009343	62.5	53.5	132
1827009338	M56x1,5	53.5	150
1827009344	62.5	53.5	150