



FAG


30311-XL

Tapered roller bearing

Tapered roller bearings 303, main dimensions
to DIN ISO 355 / DIN 720, separable,
adjusted or in pairs

X-life

Technical information

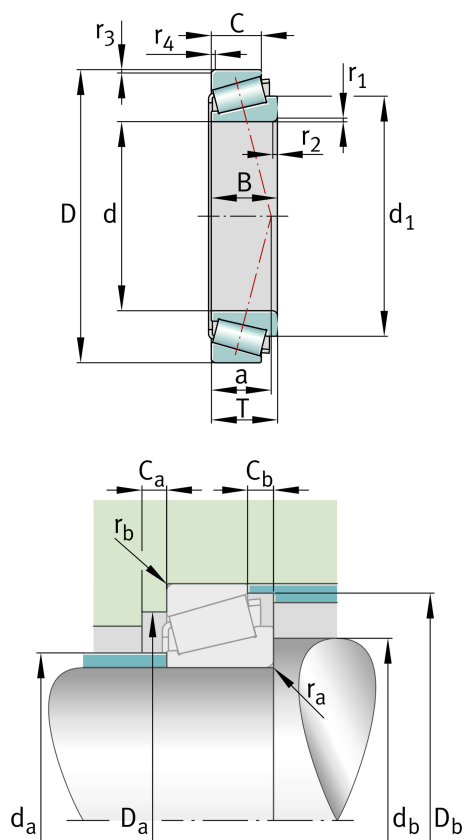

Main Dimensions & Performance Data

d	55 mm	Bore diameter
D	120 mm	Outside diameter
B	29 mm	Width, inner ring
C	25 mm	Width, outer ring
T	31.5 mm	Width, total
C _r	180,000 N	Basic dynamic load rating, radial
C _{0r}	175,000 N	Basic static load rating, radial
C _{ur}	27,500 N	Fatigue load limit, radial
n _G	7,500 1/min	Limiting speed
n _{gr}	4,350 1/min	Thermal speed rating
≈m	1.63 kg	Weight

Mounting dimensions

d _{a max}	71 mm	Maximum diameter of shaft shoulder
d _{b min}	65 mm	Minimum diameter of shaft shoulder
D _{a min}	104 mm	Minimum diameter of housing shoulder
D _{a max}	110 mm	Maximum diameter of housing shoulder
D _{b min}	111 mm	Minimum diameter of housing shoulder
C _{a min}	4 mm	Minimum axial space
C _{b min}	6.5 mm	Minimum axial space
r _{a max}	2.5 mm	Maximum fillet radius of shaft
r _{b max}	2 mm	Maximum fillet radius of housing



Dimensions

$r_{1, 2 \text{ min}}$	2.5 mm	Minimum chamfer dimension of inner ring back face
$r_{3, 4 \text{ min}}$	2 mm	Minimum chamfer dimension of outer ring back face
a	25 mm	Distance between the apexes of the pressure cones
d_1	85.4 mm	Guidance rib diameter of inner ring

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Calculation factors

e	0.35	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y	1.74	Dynamic axial load factor
Y_0	0.96	Static axial load factor

Additional information

	T2FB055	Comparative designation to ISO 10317 and ISO 355
--	---------	--