
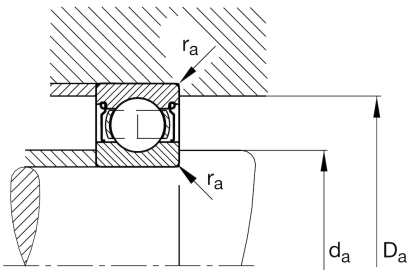


**FAG****61806-2Z**

Deep groove ball bearing

Deep groove ball bearing 618...-2Z, single row, shields, steel sheet metal cage

Technical information

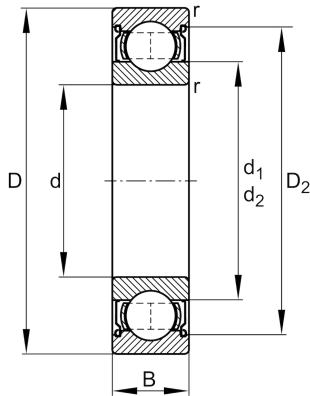

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	42 mm	Outside diameter
B	7 mm	Width
C _r	4,450 N	Basic dynamic load rating, radial
C _{0r}	3,440 N	Basic static load rating, radial
C _{ur}	154 N	Fatigue load limit, radial
n _G	20,800 1/min	Limiting speed
n _{gr}	11,500 1/min	Reference speed
≈m	20 g	Weight

Mounting dimensions

d _{a min}	32 mm	Minimum diameter shaft shoulder
D _{a max}	40 mm	Maximum diameter of housing shoulder
r _{a max}	0.3 mm	Maximum fillet radius

Dimensions

r _{min}	0.3 mm	Minimum chamfer dimension
D ₂	39.2 mm	Caliber diameter outer ring
d ₁	33.1 mm	Shoulder diameter inner ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Calculation factors

f ₀	16.5	Calculation factor
----------------	------	--------------------