

5 KG STEELCO₂ FIRE RATING 70B

SUITABLE FOR USE ON LIVE ELECTRICAL EQUIPMENT UP TO
1000V AT A DISTANCE OF 1 METRE

Product Code: FXC5S

TECHNICAL INFORMATION


- Model FXC5S - 5kg CO₂.
- Fire Rating 70B.
- Designed and manufactured in accordance with Pressure Equipment Directive 97/23/EC-PED and BS EN3.
- Extinguishing medium: Carbon Dioxide.
- Test pressure: 215 bar.
- Maximum service pressure: 169.3 bar.
- Operating pressure at 20°C: 56 bar.
- Safety device range: 175 bar to 205 bar.
- Operating temperature: -30°C to +60°C. Do not use outside specified temperature range.


MAINTENANCE & SERVICE INFORMATION

- This extinguisher must be installed and serviced to BS5306 Part 3 and Part 8.
- Check periodically, preferably once every month.
- An appointed person should visually check the extinguisher on a regular basis for damage and operational serviceability.
- Withdraw from service if the tamper seal is missing or if extinguisher is under weight.
- This extinguisher should be serviced at least annually to BS5306 Part 3 and Part 8 by a trained, competent person.
- Do not test prior to use.
- After any use, the extinguisher must be depressurised and refilled by a competent person.
- This extinguisher is a pressurised vessel and must not be pierced, dented, or subjected to external damage, fire or disposed of in a fire.
- This extinguisher must not be operated with the discharge horn removed.
- Only use genuine products and spares in conformity with manufacturer's instructions.

RECHARGE INSTRUCTIONS

- This extinguisher is a high pressure vessel and no attempt should be made to remove the valve or pressure safety device.
- This extinguisher should only be pressure tested or recharged by a specialist service centre.
- Only use recommended tools to remove the valve ensuring first that the extinguisher is fully depressurised.
- Do not overfill.



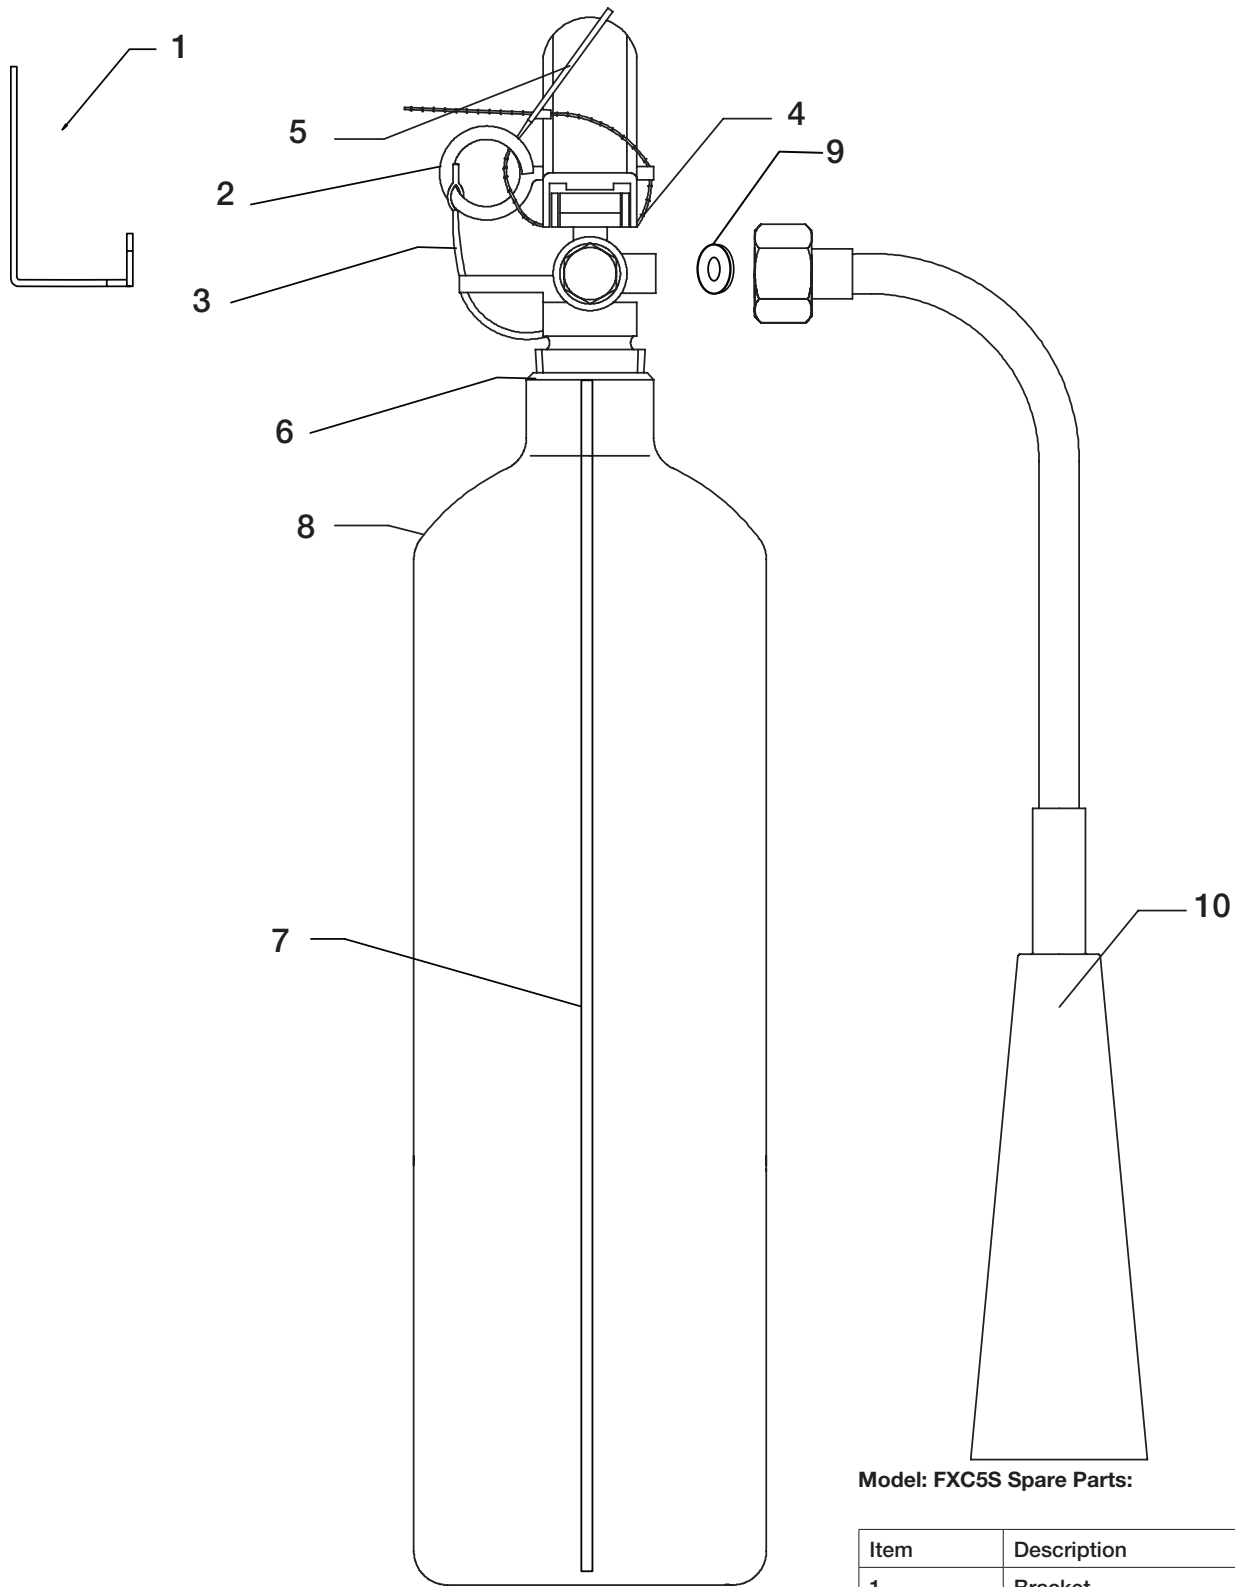

Model: FXC5S Spare Parts:

Item	Description	Product Code
1	Bracket	BEC5
2	Safety Pin	FCP
3	Pin Securing Strap	PSS
4	Tamper Indicator	FCI/ COLOUR
5	Valve	FCVC
6	Neck 'O' Ring	FCONC
7	Dip Tube	FCDC5S
8	Cylinder	N/A
9	Hose 'O' Ring	HHO1
10	Hose/Horn Assembly	HHC5