




Technical data

21319D1C3

Double row spherical roller bearings

Spherical roller bearing, one-piece machined cage, groove and lubrication holes on outer ring

Visual(s)

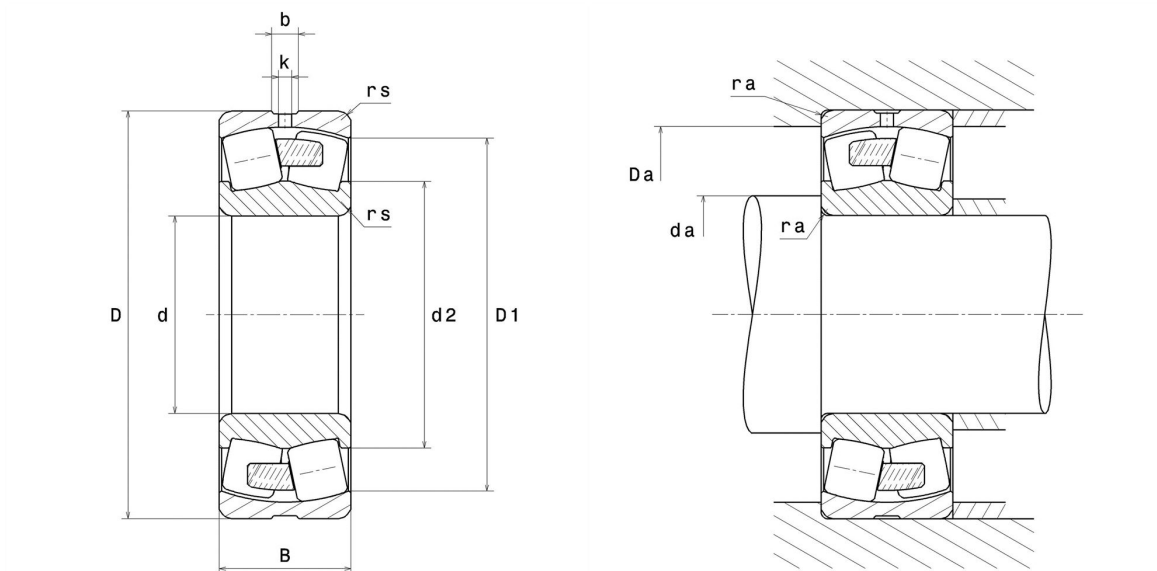

Product definition

d	95 mm
D	200 mm
B	45 mm
d2	131.4 mm
D1	171 mm
rs min	3 mm
Number of lubrication holes	4
b	7 mm
k	4 mm
e	0.23
Y1	3
Y2	4.46
Y0	2.93
Radial clearance class	C3
Brand	NTN

Product performance

Dynamic load, C	335 kN
Static load, C0	420 kN
Fatigue limit load, Cu	47.9 kN
Nref	0 Tr/min
Nlim	0 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.43 Hz
Characteristic outer ring frequency, BPF0	6.8 Hz
Characteristic inner ring frequency, BPFI	9.2 Hz

Abutment dimensions

da min	109 mm
Da max	186 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X ₀	Y ₀
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .