


Technical data

BK0609T2

Drawn cup needle roller bearings, closed end

Needle roller bearing, drawn cup, closed end

Visual(s)

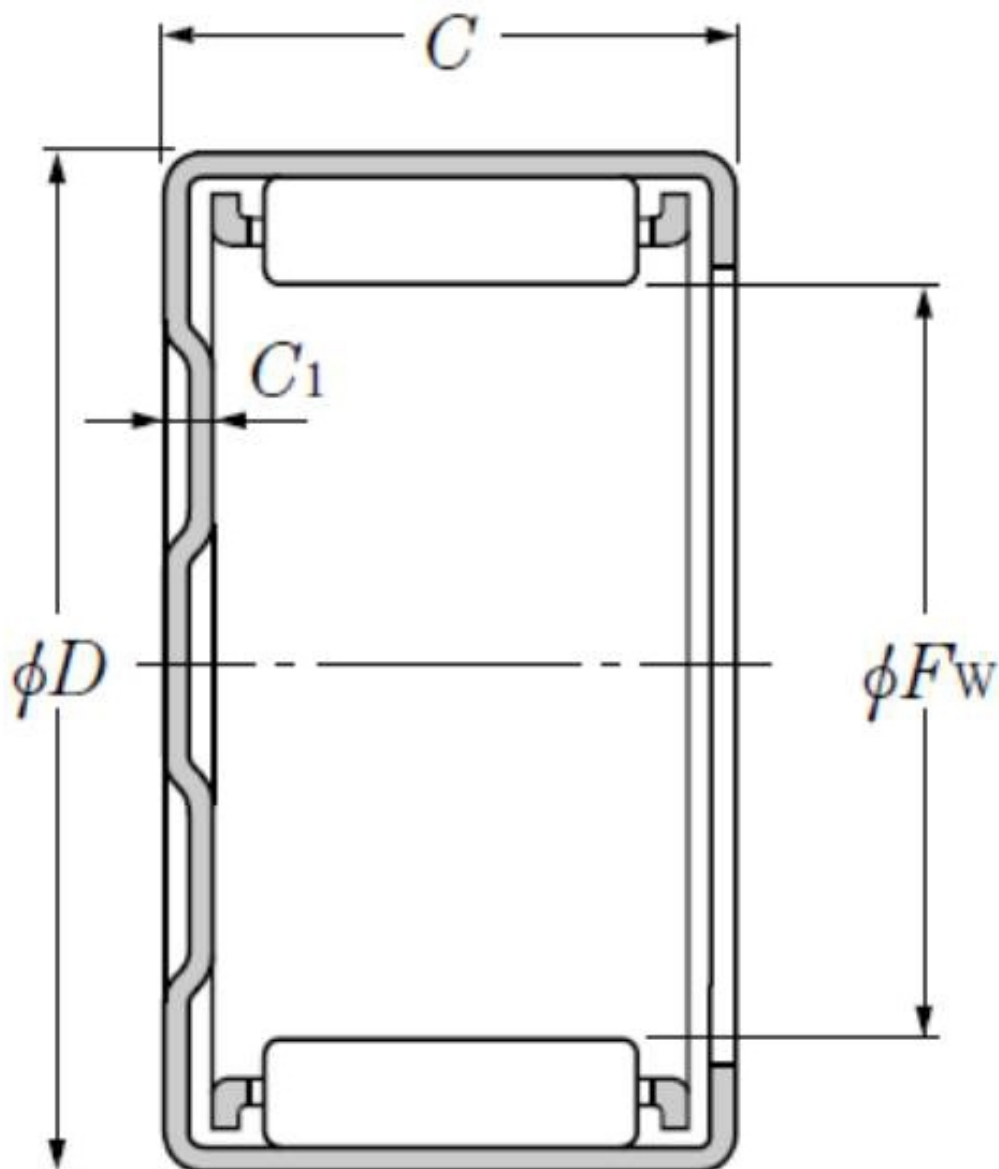

Product definition	
Fw	6 mm
D	10 mm
C	9 mm
C1	1.6 mm
Dw	1.5 mm
Lw	5.8 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	No
Mass	0.0024 kg

Product performance	
Cr	2.66 kN
C0r	2.28 kN
Nlim (grease)	25,000 Tr/min
Nlim (oil)	37,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.8 Hz
Characteristic outer ring frequency, BPF0	3.2 Hz
Characteristic inner ring frequency, BPFI	4.8 Hz