



Technical datasheet

NKXR45T2

Combined bearings



Visual(s)

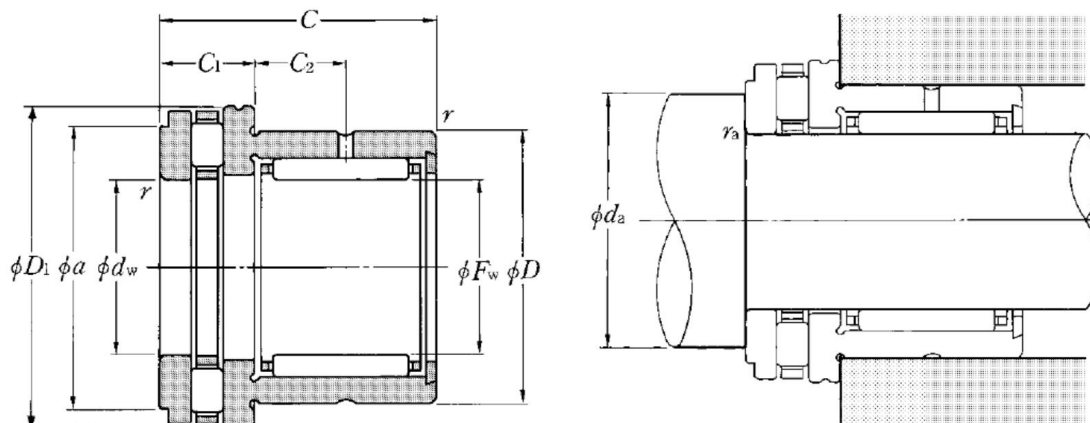

Product definition

Fw	45 mm
dw	45 mm
D	58 mm
D1	65 mm
C	32 mm
C1	14 mm
C2	9 mm
a	60.5 mm
rs min	0.6 mm
Dw	2.5 mm
Dw1	6 mm
Lw	15.3 mm
Lubrication hole on outer ring	Oui/Yes
k	3 mm
Precision class	P0
Mass	0.27 kg
Brand	NTN

Product performance

Cr	27.6 kN
Ca	45.5 kN
C0r	59 kN
C0a	135 kN
Nlim (grease)	1,100 rpm
Nlim (oil)	4,400 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	61 mm
ras max	0.6 mm