


Transmitters: Shuttle Valve VR1210/1220

3 ported check valve with one output and 2 pneumatic signal input ports. Output always supplied by high pressure inlet.




JIS Symbol



Model/Specifications

Model	VR1210-01	VR1220-02
Max. operating pressure	1.0 MPa	
Min. operating pressure	0.05 MPa	
Min. pressure differential	0.05 MPa	
Ambient and fluid temperature	-5 to 60°C (No freezing)	
Effective area	7 mm ²	15 mm ²
Port size	1/8	1/4
Weight	24 g	45 g

How to Order

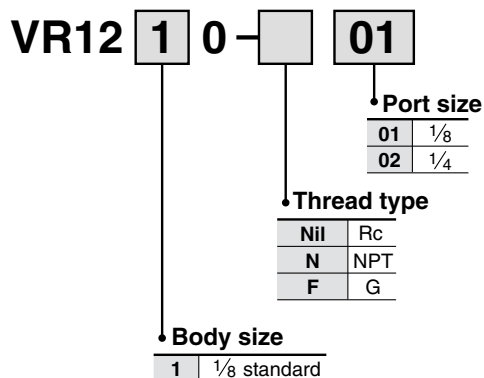

S□A

V□A

S□A

V□A


VM

VR

VH

VHS

Construction

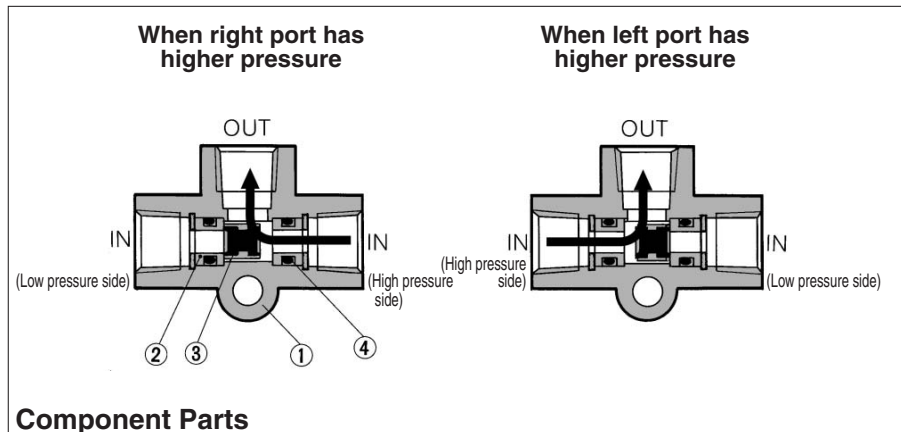

Component Parts

No.	Description	Material	Note	No.	Description	Material	Note
①	Body	ADC	Metallic plated	③	Valve	Brass, NBR	
②	Valve seat	Brass		④	O-ring	NBR	

Dimensions

