

TECHNICAL DATASHEET


Update: 31/03/2021

ALKALINE BATTERIES C-LR14 PACK X2

#item	EAN	Blister
884421	3660338378430	2 units

Specifications

Dimensions [mm]

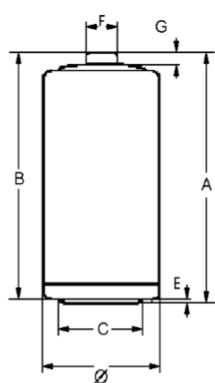

min: max:

Ø	24.9	26.2
A	-	50.0
B	48.6	-
C	13.0	-
E	-	0.9
F	-	7.5
G	1.5	-



Designation IEC	LR14
System	Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)*	5 years
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	7010 (discharge with high-resistance)
Permissible Temperature Range	- 10 °C ... 50 °C
Weight, approx. [g]	61,9
Volume [ccm]	26

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	0.9
4M/15M, 8H/D, 7D/W	3.9 Ω	Time [h]	21,4
Portable Lighting		Capacity [Ah]	6,20
		Energy [Wh]	7,10
Discharge Type	Load	End Voltage[V]	0.8
1H/D, 7D/W	3.9 Ω	Time [h]	23,6
Toy		Capacity [Ah]	6,55
		Energy [Wh]	7,19
Discharge Type	Load	End Voltage[V]	0.9
2H/D, 7D/W	400 mA	Time [h]	10,8
Portabel Stereo		Capacity [Ah]	4,30
		Energy [Wh]	4,60

Following results have been obtained in accordance with requirements of IEC 60086-5:2016

Test Matrix	Requirements	Result / Measurement
Storage after partial use	no leakage, no fire and no explosion	OK
Transportation Vibration	no leakage, no fire and no explosion	OK
Climatic –temperature cycling	no fire and no explosion	OK
Incorrect installation	no fire and no explosion	OK
External short circuit	no fire and no explosion	OK
overdischarge	no fire and no explosion	OK
Free fall	no fire and no explosion	OK

Information according to data supplied by the manufacturer – non contractual document