




Technical datasheet

NJ2212C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, single direction for axial loads, separable, pressed steel cage.

Visual(s)

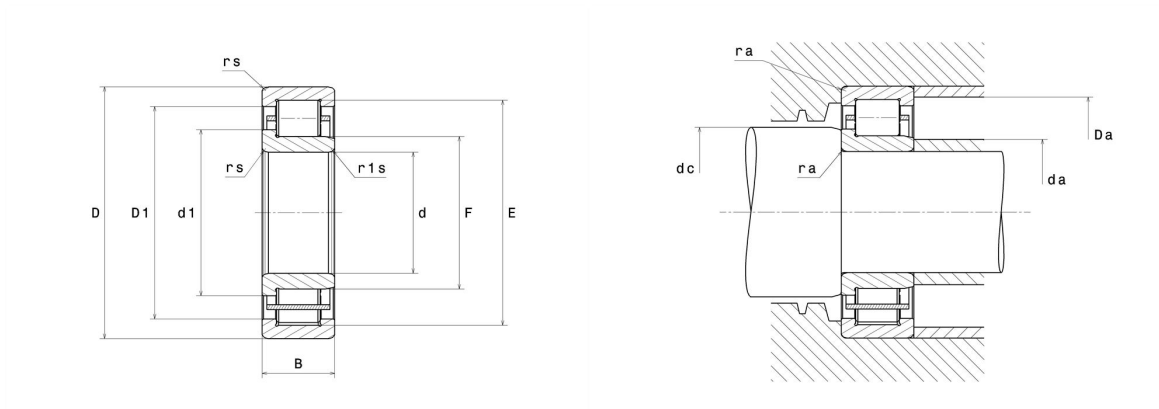

Product definition

d	60 mm
D	110 mm
B	28 mm
E	97.5 mm
F	73.5 mm
d1	78.4 mm
rs min	1.5 mm
r1s min	1.5 mm
Radial clearance class	C3
Mass (without HJ ring)	1.12 kg
Brand	NTN

Product performance

Dynamic load, C	96 kN
Static load, C0	116 kN
Fatigue limit load, Cu	14.1 kN
Nlim (oil)	6,800 rpm
Nlim (grease)	5,800 rpm
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.98 Hz
Characteristic outer ring frequency, BPF0	6.45 Hz
Characteristic inner ring frequency, BPFI	8.55 Hz

Abutment dimensions

da min	68 mm
da max	71 mm
dc min	80 mm
Da max	102 mm
ra max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = Fr$$

Equivalent static radial load

$$Po = Fr$$