



Technical data

UCPG210


Bearing units

Grey cast housing, radial insert ball bearing with socket set screws, seal with slinger

KIT CONTENT

UC210G2, PG210

VISUAL (S)

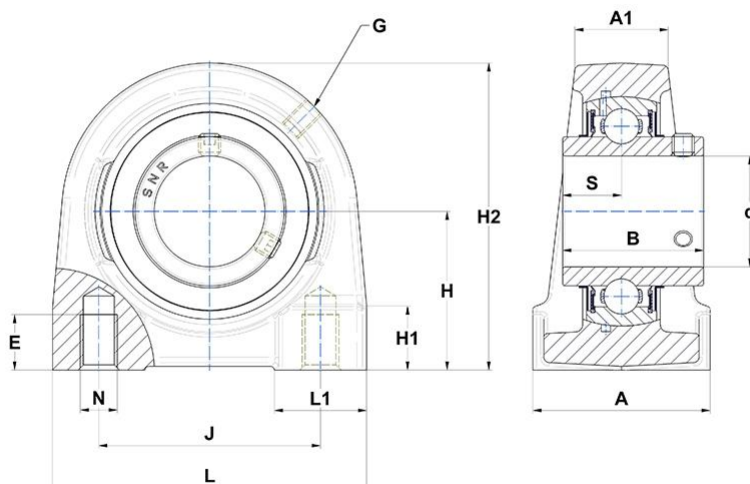

PRODUCT DEFINITION

A - Housing width	60 mm
A1 - Housing top width	35 mm
B - Width of Inner Ring	51,6 mm
d - Shaft diameter	50 mm
E - Mounting hole thread depth	25 mm
G - Grease fitting	M6x1

PRODUCT DEFINITION

H - Distance mounting base to centerline spheric. seating diam.	57,2 mm
H1 - Housing foot height	21 mm
H2 - Housing height	114 mm
J - Mounting holes distance	95 mm
L - Housing length	135 mm
L1 - Housing foot length	40 mm
N - Mounting hole dimension	M16
S - Dist. cent. of raceway to face IR on side opp. lock. device	19 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	35,1 kN
C0 - Static load rating	23,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	2,8 kg
Recommended tightening torque for set screw	22 N-m