



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKT211 - HE2311, UKT 200 Take-Up Mounted Bearings - Adapter Sleeve Locking

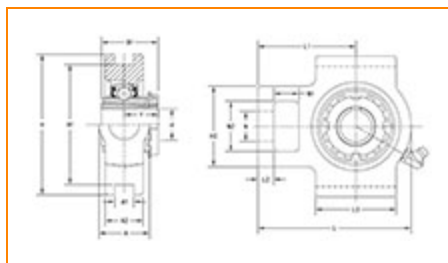

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK211 - HE2311
Adapter Sleeve Number¹	HE2311
Locking Style	Adapter Sleeve Locking
Housing Construction	Take-Up

Dimensions

Housing Width A	64 mm
Slot Width A1	22 mm
Socket Width A2	38 mm
Total Height H	146 mm





Pitch Height H1	130 mm
Height H2	102 mm
Total Length L	171 mm
Shaft Length L1	106 mm
Dimension L2	19 mm
Slot Length L3	95 mm
Adjustment Screw Bore N	35 mm
Opening Width N1	25 mm
Opening Height N2	64 mm
Center of Bearing from End Y	32 mm
Dimension B1	59 mm
Grease Nipple Size	B-R1/8

Basic Load Ratings

Static Load Rating	29400 N
Dynamic Load Rating	43400 N

¹ Purchase the Adapter Sleeve separately

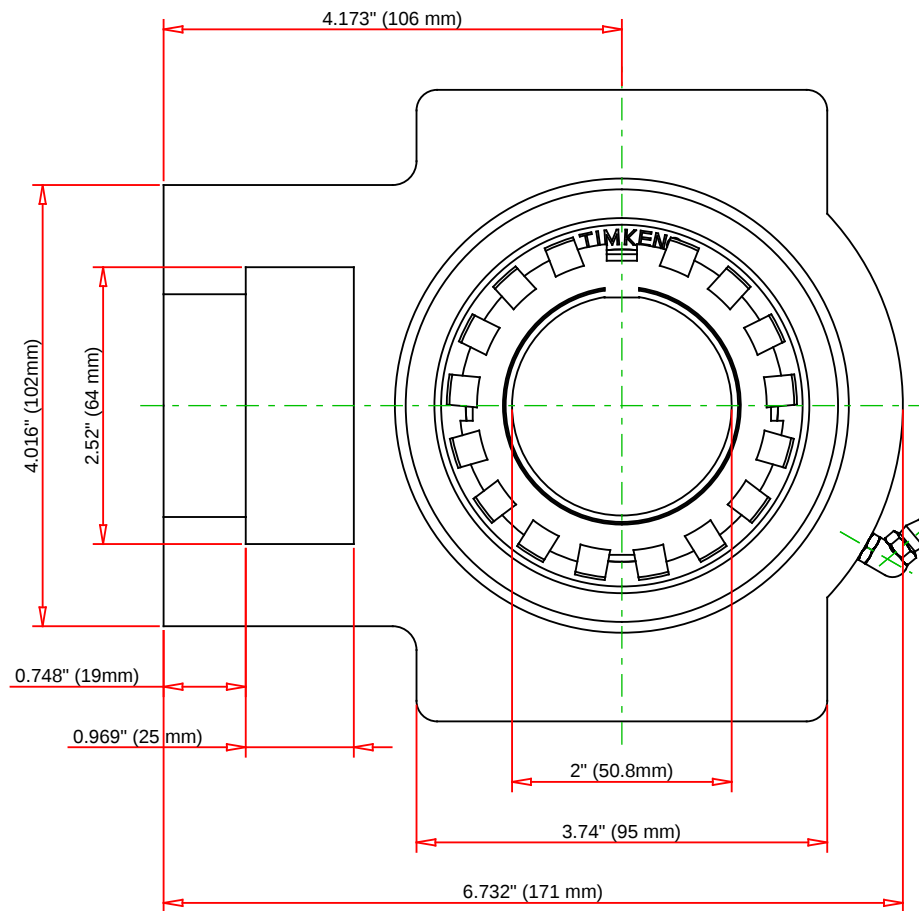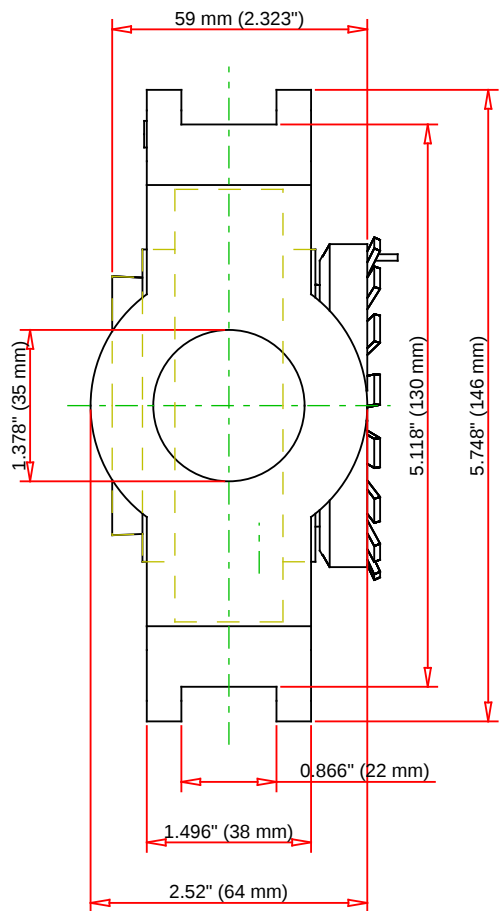

Note: Adapter sold separately

Bearing Number	UK211 - HE2311			
Load Ratings - C _r	9757	lbf	43400	N
Load Ratings - C _{0r}	6609	lbf	29400	N
Weight	9	lb	4.1	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKT211 - HE2311
UKT 200 Take-Up Mounted Bearings -
Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY