



HIGH TORQUE 304 Stainless Steel:-

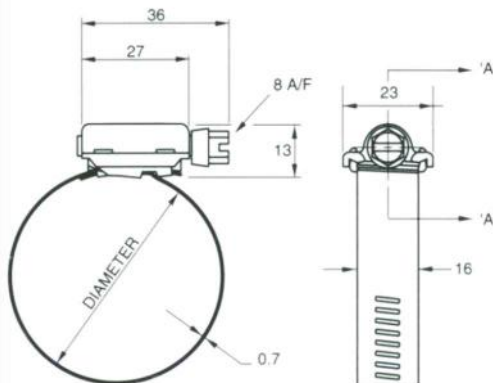

All dimensions in mm

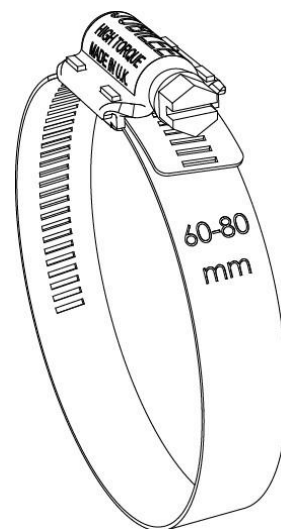

Part No.	Adjustment mm	Inches	Band Width mm	Band Thickness mm	Recommended Torque Nm	Maximum Torque Nm	Maximum Pressure PSI	Part No.
HT035	20- 35	$\frac{3}{4}$ - $1\frac{3}{8}$	16.0	0.7	11.9	17.0	304.5	HT035
HT040	25- 40	$1\frac{1}{2}$ - $\frac{5}{8}$	16.0	0.7	11.9	17.0	304.5	HT040
HT045	25- 45	$1\frac{1}{4}$ - $\frac{3}{4}$	16.0	0.7	11.9	17.0	304.5	HT045
HT050	30- 50	$1\frac{1}{4}$ - 2	16.0	0.7	11.9	17.0	304.5	HT050
HT070	40- 70	$1\frac{5}{8}$ - $2\frac{3}{4}$	16.0	0.7	11.9	17.0	153.0	HT070
HT080	60- 80	$2\frac{3}{8}$ - $3\frac{1}{8}$	16.0	0.7	11.9	17.0	153.0	HT080
HT095	70- 95	$2\frac{3}{4}$ - $3\frac{3}{4}$	16.0	0.7	11.9	17.0	153.0	HT095
HT100	80-100	$3\frac{1}{8}$ - 4	16.0	0.7	11.9	17.0	66.0	HT100
HT120	90-120	$3\frac{1}{2}$ - $4\frac{3}{4}$	16.0	0.7	11.9	17.0	66.0	HT120
HT140	110-140	$4\frac{3}{8}$ - $5\frac{1}{2}$	16.0	0.7	11.9	17.0	66.0	HT140
HT160	130-160	$5\frac{1}{8}$ - $6\frac{1}{4}$	16.0	0.7	11.9	17.0	66.0	HT160
HT180	150-180	$5\frac{7}{8}$ - 7	16.0	0.7	11.9	17.0	30.0	HT180
HT200	170-200	$6\frac{3}{4}$ - $7\frac{7}{8}$	16.0	0.7	11.9	17.0	30.0	HT200
HT220	190-220	$7\frac{1}{2}$ - $8\frac{5}{8}$	16.0	0.7	11.9	17.0	30.0	HT220
HT240	210-240	$8\frac{3}{4}$ - $9\frac{1}{2}$	16.0	0.7	11.9	17.0	30.0	HT240
HT260	230-260	9 - $10\frac{1}{4}$	16.0	0.7	11.9	17.0	30.0	HT260
HT280	250-280	$9\frac{7}{8}$ - 11	16.0	0.7	11.9	17.0	30.0	HT280
HT300	270-300	$10\frac{5}{8}$ - $11\frac{3}{4}$	16.0	0.7	11.9	17.0	30.0	HT300
HT320	290-320	$11\frac{3}{8}$ - $12\frac{1}{2}$	16.0	0.7	11.9	17.0	30.0	HT320
HT340	310-340	$12\frac{1}{4}$ - $13\frac{3}{8}$	16.0	0.7	11.9	17.0	n/a	HT340
HT360	330-360	$13\frac{1}{4}$ - $14\frac{1}{8}$	16.0	0.7	11.9	17.0	n/a	HT360
HT380	350-380	$13\frac{3}{4}$ - 15	16.0	0.7	11.9	17.0	n/a	HT380
HT400	370-400	$14\frac{1}{2}$ - $15\frac{3}{4}$	16.0	0.7	11.9	17.0	n/a	HT400
HT420	390-420	$15\frac{3}{8}$ - $16\frac{1}{2}$	16.0	0.7	11.9	17.0	n/a	HT420
HT440	410-440	$16\frac{1}{8}$ - $17\frac{1}{4}$	16.0	0.7	11.9	17.0	n/a	HT440
HT460	430-460	17 - $18\frac{1}{8}$	16.0	0.7	11.9	17.0	n/a	HT460
HT480	450-480	$17\frac{3}{4}$ - $18\frac{7}{8}$	16.0	0.7	11.9	17.0	n/a	HT480
HT500	470-500	$18\frac{1}{2}$ - $19\frac{5}{8}$	16.0	0.7	11.9	17.0	n/a	HT500
HT520	490-520	$19\frac{5}{16}$ - $20\frac{1}{2}$	16.0	0.7	11.9	17.0	n/a	HT520

Quality Assurance:-



Corrosion Resistance: 1000 hours NSS Test

Fastening: 8mm A/F screw

Industry Recommendations:-



SAE J1508 Surface Vehicle Standards-Hose Clamp Specifications, Type HD is referenced in the quality control methods for the design/manufacture of the Jubilee High Torque Range of clips.

304 Stainless Steel

The finest hose clip
in the world