

Technical Data Sheet

Classical Timing Belt – (CTB)


XL Profile

Dimensions

Pitch Length (Pd)	5.08 mm
Teeth Height (Ht)	1.27 mm $\pm$ 0.10
Belt Height (Hd)	2.30 mm $\pm$ 0.20

Construction & Materials

1	CR Rubber
2	Fibreglass Tensile cord
3	Nylon tooth facing

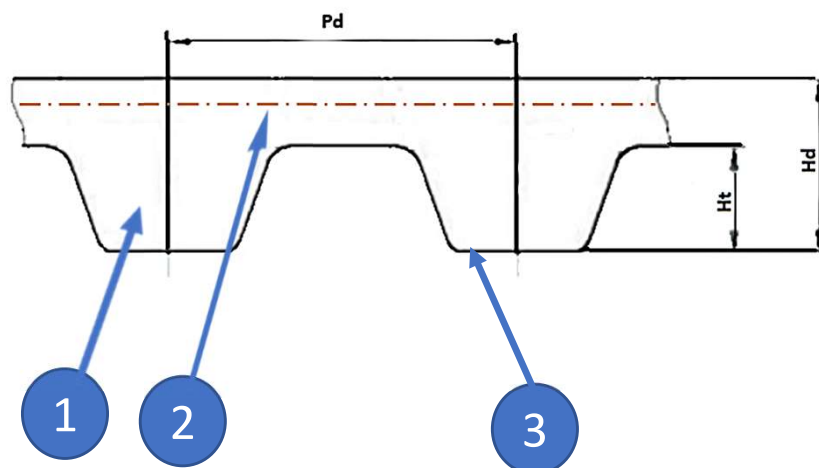

Labelling

MECALINE	DO NOT CRIMP	364XL	CLASSICAL TIMING BELT	895036		1523	N15C110924 001
MECALINE	DO NOT CRIMP	364XL	CLASSICAL TIMING BELT	895036		1523	N15C110924 002
MECALINE	DO NOT CRIMP	364XL	CLASSICAL TIMING BELT	895036		1523	N15C110924 003
MECALINE	DO NOT CRIMP	364XL	CLASSICAL TIMING BELT	895036		1523	N15C110924 004
MECALINE	DO NOT CRIMP	364XL	CLASSICAL TIMING BELT	895036		1523	N15C110924 005

Length & Profile

Production Date

CTB length identification

Example :

250-XL-025

250 = Belt length in 10ths of 1" (i.e. 25")

XL = Pitch

025 = Width as inch, i.e. 1/4"

Standards & Specifications

- Conforms to ISO 13050 Standards
- Hardness 73 $\pm$ 4 SHA°
- Temperature Range -20 ~ +100°C
- Conditionally oil resistant

Range

Standard belts lengths from :
6" – 60" (152mm - 1524mm)

Standard Belt Widths

Imperial	025	031	037
Fraction	1/4"	5/16"	3/8"
mm	6.35	7.94	9.52