

Vacuum generators VADM/VADMI

FESTO




Vacuum generators VADM/VADMI

FESTO

Key features

Product overview

Vacuum generators



All Festo vacuum generators have a single-stage design and operate according to the Venturi principle. The product series described below

have been designed for a wide range of applications. The different performance classes of the individual product families make it possible to select

vacuum generators tailored to suit the specific requirements of each application.

Standard and inline ejectors

VN

Technical data → Internet: vn



- Nominal width 0.45 ... 3 mm
- Max. vacuum 93%
- Temperature range 0 ... +60 °C
- A range of extremely effective generators suitable for use directly in the working area
- Available with straight or T-shaped housing
- Minimal space required
- Cost-effective
- No wearing parts
- Extremely fast evacuation time
- Vacuum switch (optional)
- Optional additional functions:
 - Integrated ejector pulse
 - Electrical control for vacuum ON/OFF
 - Combination of ejector pulse and actuation

VAD/VAK

Technical data → Internet: vad



- Nominal width 0.5 ... 1.5 mm
- Max. vacuum 80%
- Temperature range -20 ... +80 °C
- Range of vacuum generators with sturdy aluminium housing
- VAK-...: Integrated volume, VAD-...: Connection for external volume
- Maintenance-free
- VAK: Reliable setting down of workpieces

Vacuum generators VADM/VADMI

FESTO

Key features

Compact ejectors

OVEM

Technical data → Internet: ovem



- Nominal width 0.45 ... 2 mm
- Max. vacuum 93%
- Temperature range 0 ... +50 °C
- Compact design
- Minimal installation work required
- Short switching times
- Integrated solenoid valves for vacuum ON/OFF and ejector pulse
- Filter with display
- Vacuum sensor with LCD display for continuous monitoring of the entire vacuum system
- Optional air saving function
- Reliable setting down of workpieces
- Blocking of multiple vacuum generators on a common supply manifold

VADM/VADMI

→ 9



- Nominal width 0.45 ... 3 mm
- Max. vacuum 85%
- Temperature range 0 ... +60 °C
- Compact design
- Minimal installation work required
- Short switching times
- Integrated solenoid valve (on/off)
- VADMI: additional integrated solenoid valve for ejector pulse
- Filter with display
- Optional air saving function
- Vacuum switch (optional)
- Reliable setting down of workpieces

VAD-M

Technical data → Internet: vad-m



- Nominal width 0.7 ... 2 mm
- Max. vacuum 85%
- Temperature range 0 ... +40 °C
- Compact design
- Minimal installation work required
- Short switching times
- Integrated solenoid valve (on/off)
- VAD-M-I: additional integrated solenoid valve for ejector pulse
- Reliable setting down of workpieces

Vacuum generators VADM/VADMI

FESTO

Type codes

		VADMI	—	45	—	LS	—	P
Type								
VADM	Vacuum generator without ejector pulse							
VADMI	Vacuum generator with ejector pulse							
Nominal width of Laval nozzle [mm]								
45	0.45							
70	0.70							
95	0.95							
140	1.40							
200	2.00							
300	3.00							
Functions								
LS	With air saving function							
Switching output, vacuum switch								
P	PNP							
N	NPN							

-  - Note


Possible combinations can be found in the ordering data.

Vacuum generators VADM/VADMI


Technical data

FESTO


VADM without vacuum switch




VADM with vacuum switch





-  - Temperature range
0 ... +60 °C
-  - Operating pressure
1.5 ... 8 bar
-  - www.festo.com

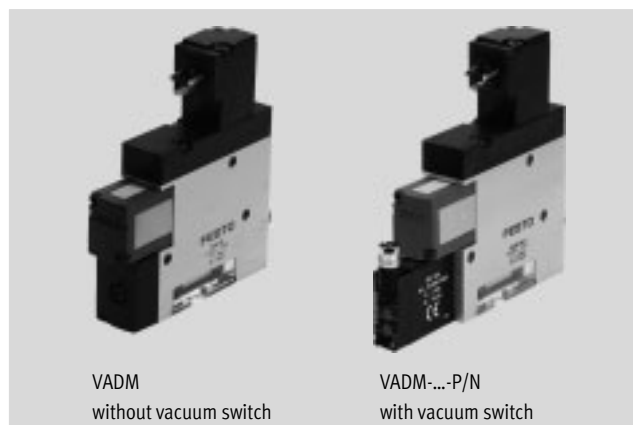

VADMI without vacuum switch



VADMI with vacuum switch

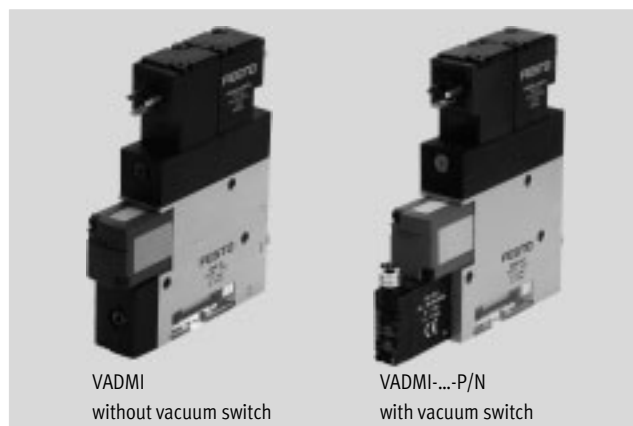

General technical data							
Type		VADM/VADMI					
		-45	-70	-95	-140	-200	-300
Nominal width of Laval nozzle	[mm]	0.45	0.7	0.95	1.4	2.0	3.0
Grid dimension	[mm]	10	15	18	22	22	22
Grade of filtration	[µm]	≤40					
Mounting position		Any					
Type of mounting		With through-hole					
		Via female thread					
Pneumatic connection 1 (P)		M5	M5	G1/8	G1/8	G1/4	G1/4
Vacuum port (V)		M5	G1/8	G1/8	G1/4	G3/8	G3/8
Pneumatic connection 3 (R)		Integrated silencer					

Technical data – Design		
Type	VADM	VADMI
Ejector characteristic	High vacuum	
Silencer design	Closed	
Integrated function	Electric on-off valve	
	Filter	
	–	
	Flow control valve	
	Ejector pulse valve, electrical	
	Check valve	
	-P/-N	Vacuum switch
	-LS-P/-N	–
Valve function	Closed	
Manual override	Non-detenting	

Vacuum generators VADM/VADMI



Technical data

Operating and environmental conditions					
Type		VADM/VADMI			
		Without vacuum switch		With vacuum switch -P/N	
		-45/70	-95/140/200/300	-45/70	-95/140/200/300
Operating pressure	[bar]	1.5 ... 8	2 ... 8	1.5 ... 8	2 ... 8
Nominal operating pressure	[bar]	6			
Max. overload pressure	[bar]	–		5 (VADMI only)	
Operating medium		Compressed air to ISO 8573-1:2010 [7:4:4]			
Note on operating/pilot medium		Lubricated operation not possible			
Ambient temperature	[°C]	0 ... +60		0 ... +50	
Temperature of medium	[°C]	0 ... +60			
Corrosion resistance class CRC ¹⁾		2			
CE marking (see declaration of conformity)		–		To EU EMC Directive ²⁾	
Certification		c UL us - Recognized (OL)			
		–		RCM compliance mark	

- 1) Corrosion resistance class CRC 2 to Festo standard FN 940070
Moderate corrosion stress. Indoor applications in which condensation may occur. External visible parts with primarily decorative requirements for the surface and which are in direct contact with the ambient atmosphere typical for industrial applications.
- 2) For information about the applicability of the component see the manufacturer's EC declaration of conformity at: www.festo.com/sp → Certificates.
If the component is subject to restrictions on usage in residential, office or commercial environments or small businesses, further measures to reduce the emitted interference may be necessary.

Performance data – High vacuum												
Type	VADM						VADMI					
	-45	-70	-95	-140	-200	-300	-45	-70	-95	-140	-200	-300
Max. vacuum [%]	85						85					
Air supply time ¹⁾ for 1 l volume, at p ₁ = 6 bar [s]	5.9	2.2	1.18	0.69	0.29	0.26	1.9	0.59	2.04	0.19	0.15	0.2

- 1) Time required to reduce vacuum to –0.05 bar.

Technical data – Electrical connection	
Electrical connection	Plug
Operating voltage range [V DC]	21.6 ... 26.4
Duty cycle [%]	100
Degree of protection	IP65