



Technical data

UKF207H


Bearing units

Grey cast housing, radial insert ball bearing with adapter sleeve, seal with slinger

KIT CONTENT

UK207G2H, F207

VISUAL (S)

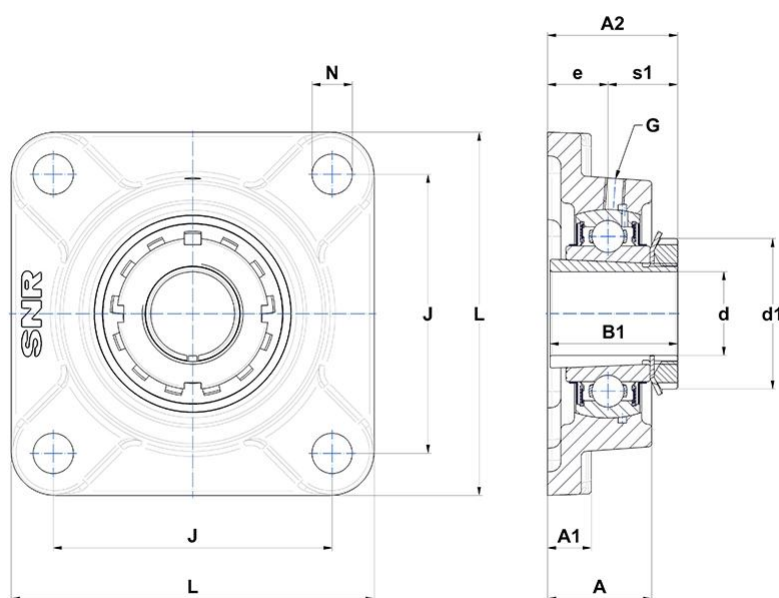

PRODUCT DEFINITION

A - Housing height	34 mm
A1 - Housing foot height / flange height	15 mm
A2 - Total height from mounting surface	41,5 mm
B - Width of Inner Ring	27 mm
B1 - Overall width IR (with eccent. locking collar/adapt. sleeve)	43 mm
d - Shaft diameter	30 mm

PRODUCT DEFINITION

d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	52 mm
e - Distance mounting surface to bearing center	19 mm
G - Grease fitting	M6x1
J - Mounting holes distance	92 mm
L - Housing width / diameter	117 mm
N - Mounting hole dimension	14 mm
s1 - Distance nut to middle of bearing raceway	22,5 mm
Brand	SNR

PRODUCT PERFORMANCE

C - Dynamic load rating	25,7 kN
C0 - Static load rating	15,2 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	1,57 kg
Adapter sleeve reference	H2307