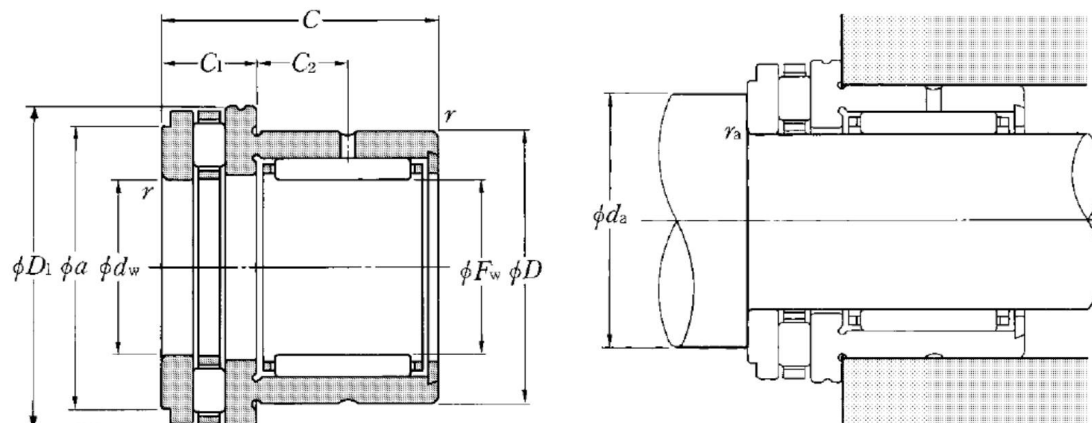

Visual(s)

Product definition

Fw	50 mm
dw	50 mm
D	62 mm
D1	70 mm
C	35 mm
C1	14 mm
C2	10 mm
a	65.5 mm
rs min	0.6 mm
Dw	2.5 mm
Dw1	6 mm
Lw	16.8 mm
Lubrication hole on outer ring	Oui/Yes
k	3 mm
Precision class	P0
Mass	0.31 kg
Brand	NTN

Product performance

Cr	27.9 kN
Ca	48.5 kN
C0r	62 kN
C0a	150 kN
Nlim (grease)	1,000 rpm
Nlim (oil)	4,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	66 mm
ras max	0.6 mm