

FAG



XCS71904-E-T-P4S-UL

Angular contact ball bearing

Schaeffler ID:
0386966220000

Spindle bearings XCS719..-E, adjusted, in pairs or sets, contact angle $\alpha = 25^\circ$, with ceramic balls, lip seal on both sides, non-contact, restricted tolerances, with Cronidur rings

Technical information

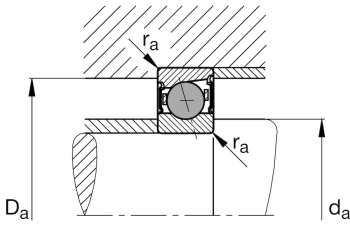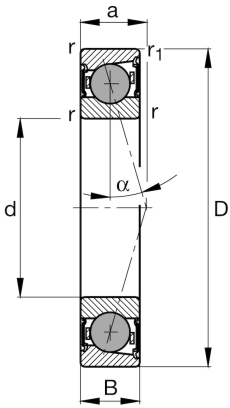

Main Dimensions & Performance Data

d	20 mm	Bore diameter
D	37 mm	Outside diameter
B	9 mm	Width
C _r	5,200 N	Basic dynamic load rating, radial
C _{0r}	1,560 N	Basic static load rating, radial
C _{ur}	126 N	Fatigue load limit, radial
n _{G Grease}	75,000 1/min	Limiting speed for grease lubrication
	43.9 g	Weight

Mounting dimensions


d _a	24 mm	Diameter shaft shoulder
d _a	h12	Diameter shaft shoulder clearance
D _a	33.5 mm	Shoulder diameter outer ring
D _a	H12	Shoulder diameter outer ring clearance
r _{a max}	0.3 mm	Maximum recess radius
r _{a1 max}	0.15 mm	Maximum recess radius
a	11.1 mm	Distance between the apexes of the pressure cones

Dimensions

r _{min}	0.3 mm	Minimum chamfer dimension
r _{1 min}	0.3 mm	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	80 °C	Operating temperature max.

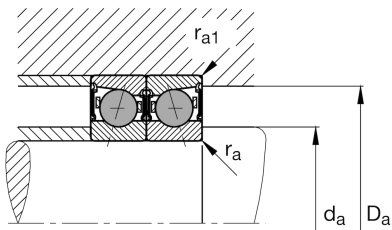

Additional information

F_{VL}	15 N	Preload force light
F_{VM}	44 N	Preload force medium
F_{VH}	88 N	Preload force heavy
K_{aEL}	42 N	Lift-off force light
K_{aEM}	128 N	Lift-off force medium
K_{aEH}	261 N	Lift-off force heavy
c_{aL}	36.9 N/ μ m	Axial rigidity light
c_{aM}	54.6 N/ μ m	Axial rigidity medium
c_{aH}	70.7 N/ μ m	Axial rigidity heavy