

Technical Data Sheet

HTD Timing Belt


14M Profile

Dimensions






Pitch Length	14 mm
Teeth Height (h)	6.02 mm +0.15/-0.35
Belt Height (T)	10 mm ± 0.60

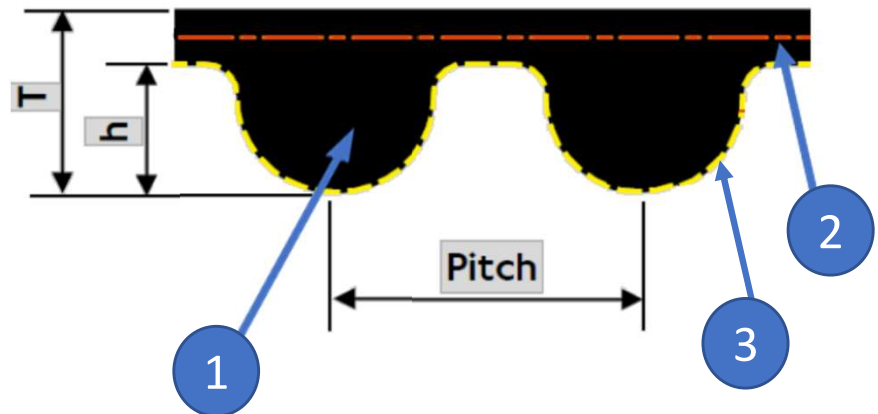Construction & Materials

1	CR Rubber
2	Fibreglass Tensile cord
3	Nylon tooth facing



Labelling

	DO NOT CRIMP	2660-14M	HTD TIMING BELT	894934		1523	N15C110924 001
	DO NOT CRIMP	2660-14M	HTD TIMING BELT	894934		1523	N15C110924 002
	DO NOT CRIMP	2660-14M	HTD TIMING BELT	894934		1523	N15C110924 003
	DO NOT CRIMP	2660-14M	HTD TIMING BELT	894934		1523	N15C110924 004

Length & Profile

Production Date

Standards & Specifications

- Conforms to ISO 13050 Standard
- Hardness 80± 4 SHA°
- Temperature Range -20 ~ +100°C
- Conditionally Oil resistant

Range

Standard belts lengths from :
826mm – 4578mm

Standard belt widths:

40mm / 50mm / 85mm / 115mm
/ 170mm