



The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Part Number 16150, Tapered Roller Bearings - Single Cones - Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

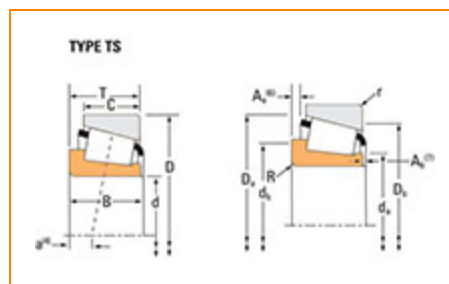

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	16000
Cone Part Number	16150
Design Units	Imperial
Cage Type	Stamped Steel
C1 - Dynamic Radial Rating (Two-Row, 1 million revolutions)¹	22200 lbf 98600 N
C90(2) - Dynamic Radial Rating (Two-Row, 90 million revolutions)²	5750 lbf 25600 N



Dimensions

d - Cone Bore	1 1/2 in 38.1 mm
B - Cone Width	0.8125 in 20.638 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius³	0.140 in 3.6 mm
da - Cone Frontface Backing Diameter	1.69 in 43 mm
db - Cone Backface Backing Diameter	1.95 in 49.5 mm
Ab - Cage-Cone Frontface Clearance	0.07 in 1.8 mm
Aa - Cage-Cone Backface Clearance	0.02 in 0.5 mm
a - Effective Center Location⁴	-0.16 in -4.1 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁵	3300 lbf 14700 N
C1 - Dynamic Radial Rating (1 million revolutions)⁶	12700 lbf 56600 N
C0 - Static Radial Rating	14800 lbf 65800 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁷	2270 lbf 10100 N

Factors

K - Factor⁸	1.45
G1 - Heat Generation Factor (Roller-Raceway)	20.3
G2 - Heat Generation Factor (Rib-Roller End)	10.6
Cg - Geometry Factor⁹	0.0707

¹ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

² Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

³ These maximum fillet radii will be cleared by the bearing corners.

⁴ Negative value indicates effective center inside cone backface.


⁵ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.

⁶ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁷ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ Geometry constant for Lubrication Life Adjustment Factor a_3 .

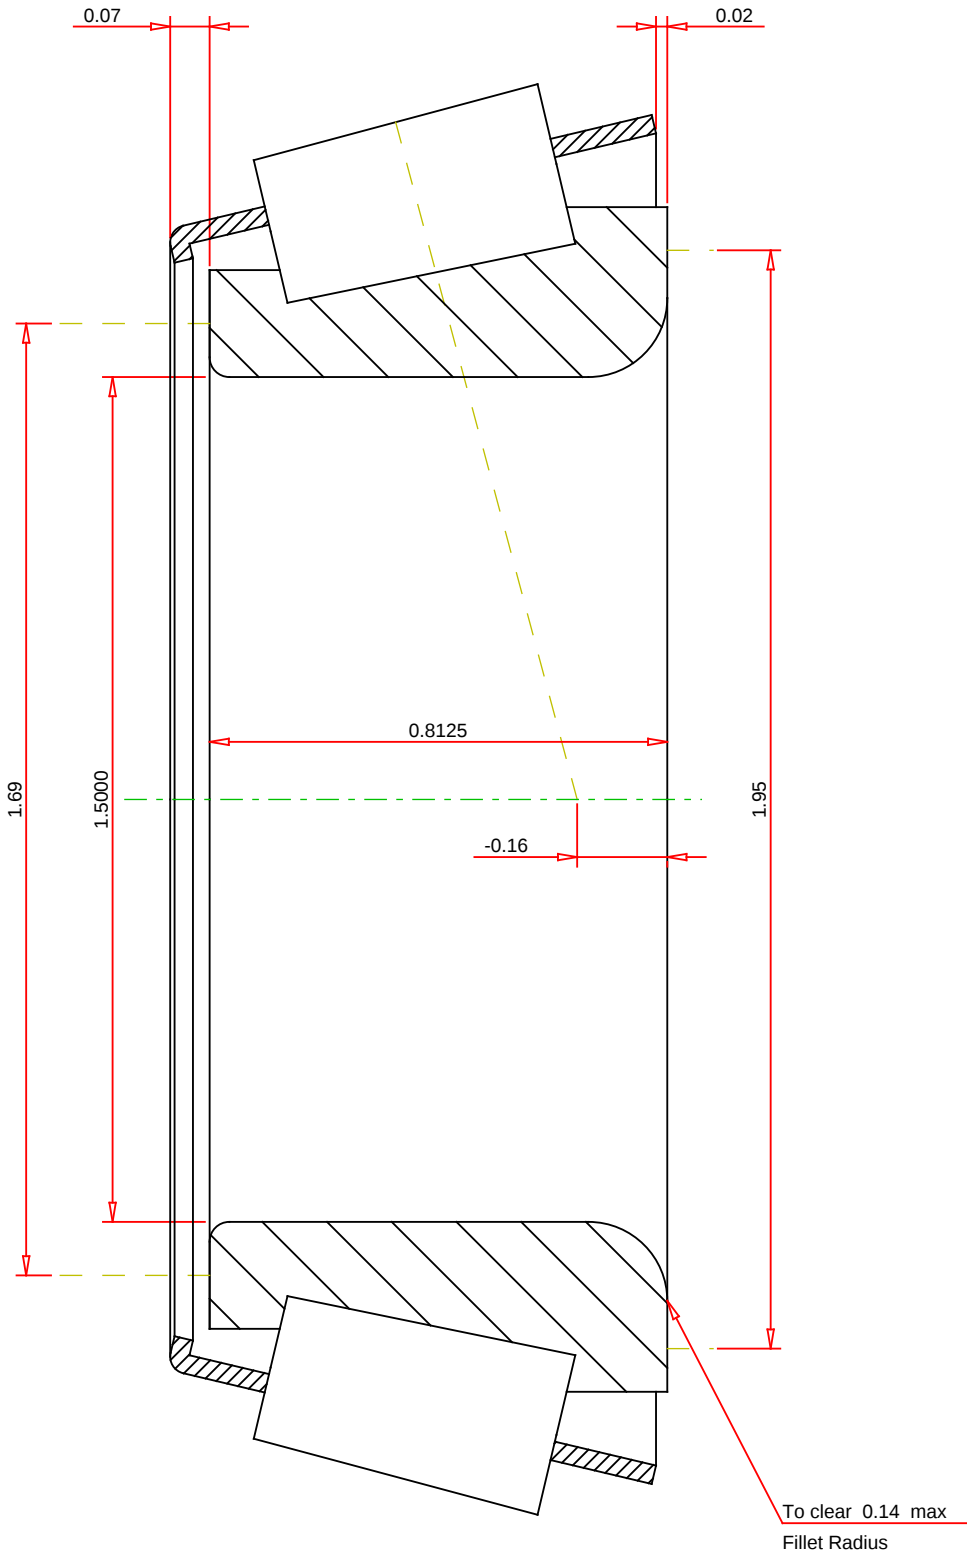

IMPERIAL UNITS

Number of Rollers Per Row18	TIMKEN®	16150 Tapered Roller Bearings - Single Cones - Imperial	
	THE TIMKEN COMPANY NORTH CANTON, OHIO USA	K Factor1.45 Dynamic Radial Rating - C903300 lbf Dynamic Thrust Rating - Ca902270 lbf Dynamic Radial Rating - C112700 lbf	
Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.		FOR DISCUSSION ONLY	