



Technical data

UKP212H


Bearing units

Grey cast housing, radial insert ball bearing with adapter sleeve, seal with slinger

KIT CONTENT

UK212G2H, P212

VISUAL (S)

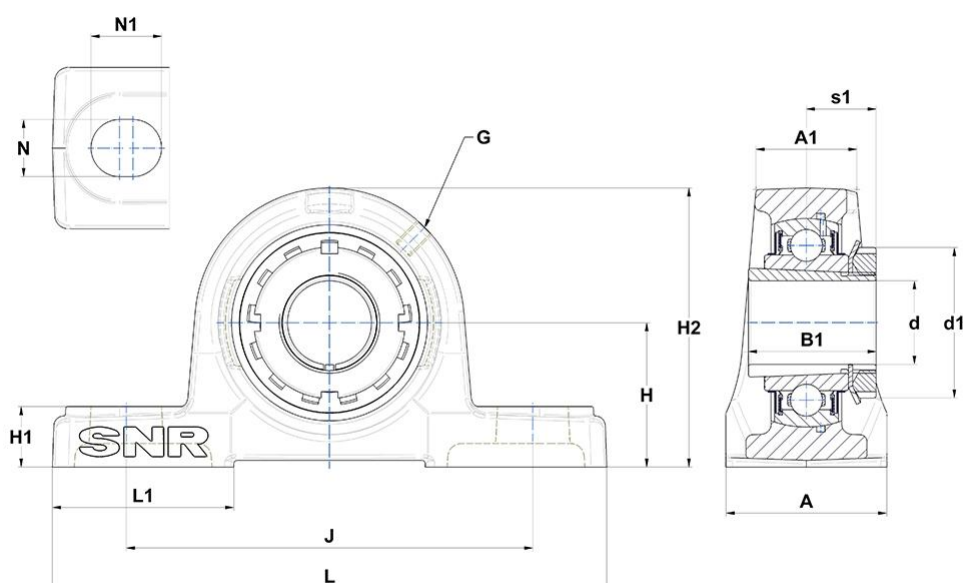

PRODUCT DEFINITION

Brand	SNR
A - Housing width	70 mm
A1 - Housing top width	44 mm
B - Width of Inner Ring	36 mm
d - Shaft diameter	55 mm
d1 - Outer dia of eccent. Lock. collar / nut of adapter sleeve	80 mm

PRODUCT DEFINITION

G - Grease fitting	M6x1
H - Distance mounting base to centerline spheric. seating diam.	69,8 mm
H1 - Housing foot height	25 mm
H2 - Housing height	138 mm
J - Mounting holes distance	184 mm
L - Housing length	241 mm
L1 - Housing foot length	70 mm
N - Mounting hole dimension	20 mm
N1 - Mounting hole length	25 mm
s1 - Distance nut to middle of bearing raceway	31 mm

PRODUCT PERFORMANCE

C - Dynamic load rating	52,5 kN
C0 - Static load rating	32,8 kN
Operating temperature min.	-20 °C
Operating temperature max.	100 °C

OTHER FEATURES

Mass	5,01 kg
Adapter sleeve designation	H2312