


Pressure Switches, Series PM1

- Operating pressure -0,9 ... 0 0,2 ... 16 bar
- Mechanical
- Spring-loaded bellow, adjustable
- Electr. connection Plug M12x1
- Compressed air connection Internal thread G 1/4 Flange with O-ring Ø 5x1,5

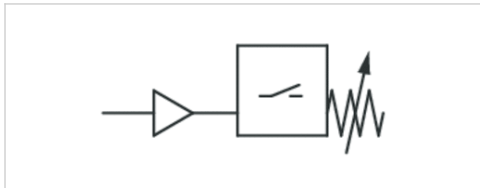

Type	Mechanical
Function	change-over contact (mechanical)
Mounting orientation	Any
Working pressure min./max.	See table below
Ambient temperature min./max.	-20 ... 80 °C
Medium temperature min./max.	-10 ... 80 °C
Medium	Compressed air, Hydraulic oil
Measurement	Relative pressure
Switching element	microswitch (input/output)
Protection against overpressure	80 bar
Max. switching frequency	1,5 Hz
Shock resistance max.	15 g
Vibration resistance	10 g (60 - 500 Hz)
Repeatability (% of full scale value)	± 1 %
Switching point	adjustable
Hysteresis	max. switching pressure difference
DC operating voltage min./max.	12 ... 30 V DC
Operational voltage AC min./max.	12 ... 30 V AC
Mounting types	via through holes
Protection class	IP67
Electr. connection	Plug M12x1
Weight	0,15 kg

Technical data

Part No.	Type	Operating pressure range	Compressed air connection	Fig.	
		min./max.			
R412010716	PM1-M3-G014	-0,9 ... 0 bar	Internal thread, G 1/4	Fig. 1	-
R412010717	PM1-M3-G014	0,2 ... 16 bar	Internal thread, G 1/4	Fig. 1	1)
R412010719	PM1-M3-F001	-0,9 ... 0 bar	Flange with O-ring, Ø 5x1,5	Fig. 2	-
R412010720	PM1-M3-F001	0,2 ... 16 bar	Flange with O-ring, Ø 5x1,5	Fig. 2	1)

1) Min. switching pressure range 0.2 bar falling/0.5 bar rising

Technical information

Switching function increasing pressure: contact switches from 1-2 to 1-3.

Switching function decreasing pressure: contact switches from 1-3 to 1-2.

Notice: Too-high currents can damage contacts. Inductive or capacitive loads must be equipped with appropriate spark-quenching!


The microswitch has silver-plated contacts.

Technical information

Material	
Housing	Aluminum
Seals	Acrylonitrile butadiene rubber
Electr. connection	Brass, nickel-plated

Dimensions


Fig. 1

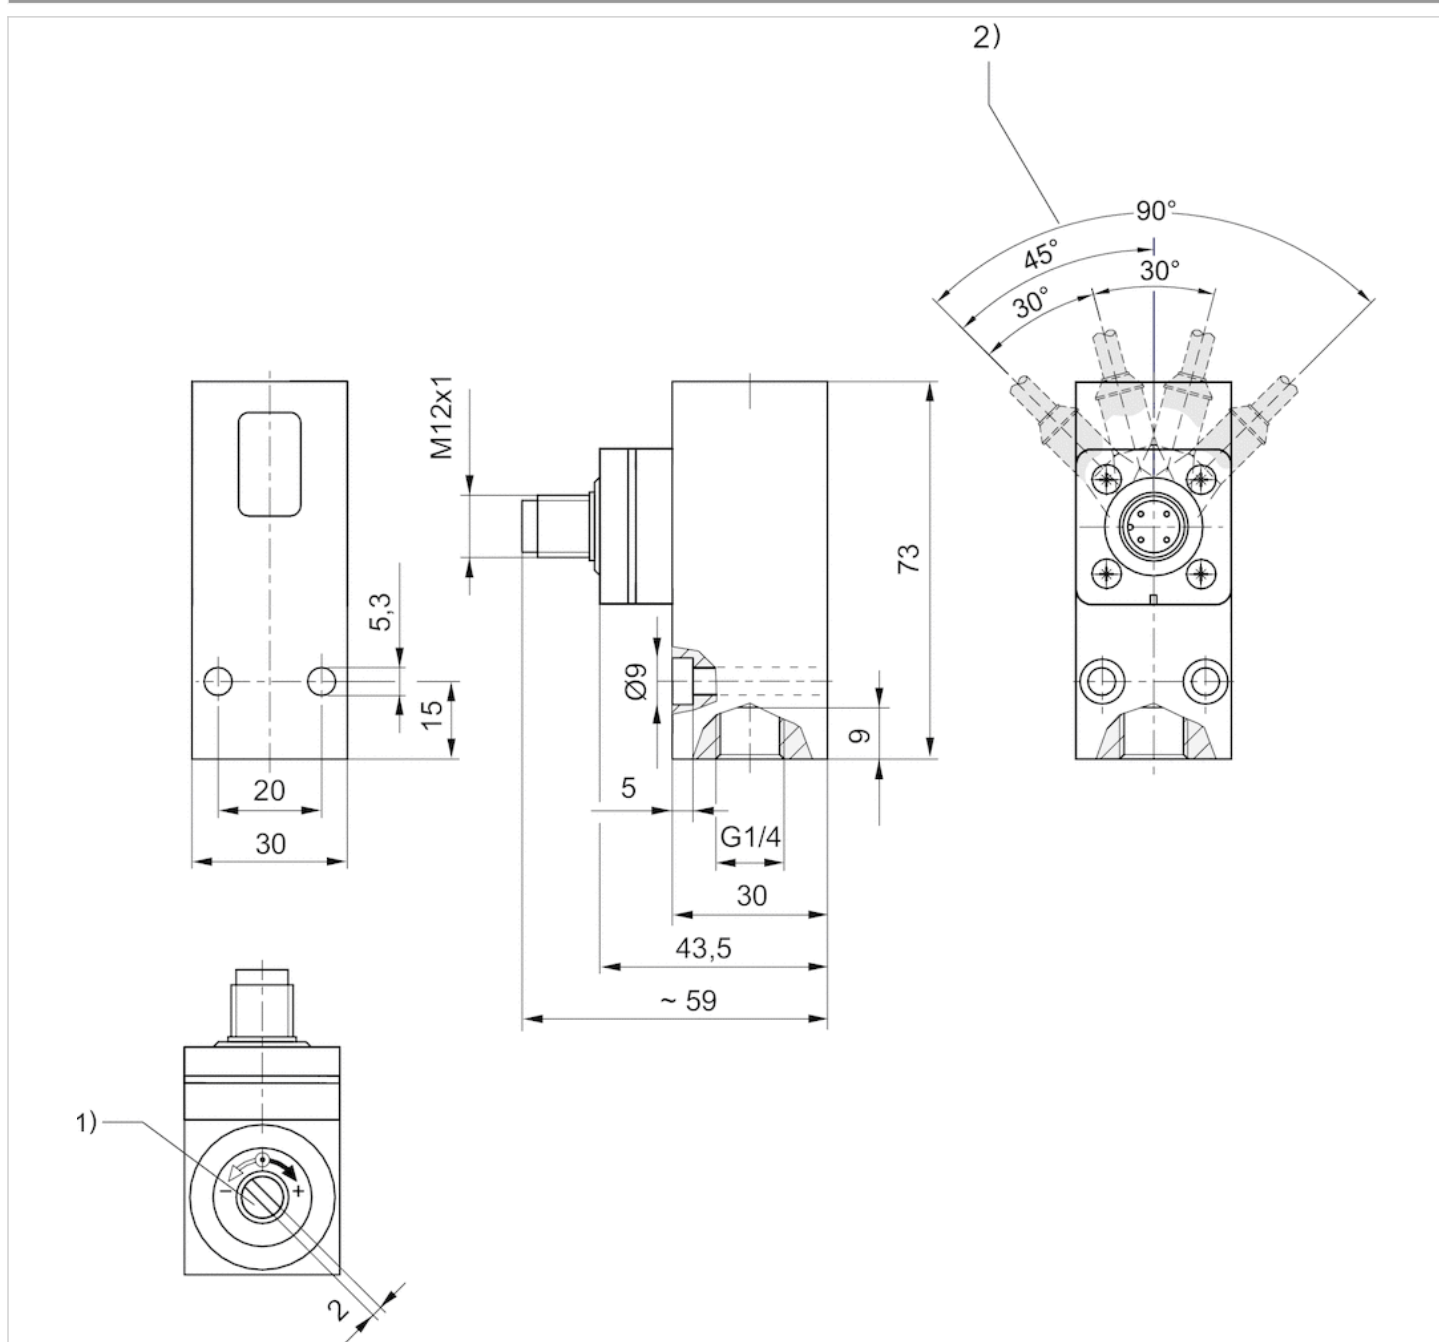

1) Adjustment screw, self-holding

2) Detent position


Fig. 2

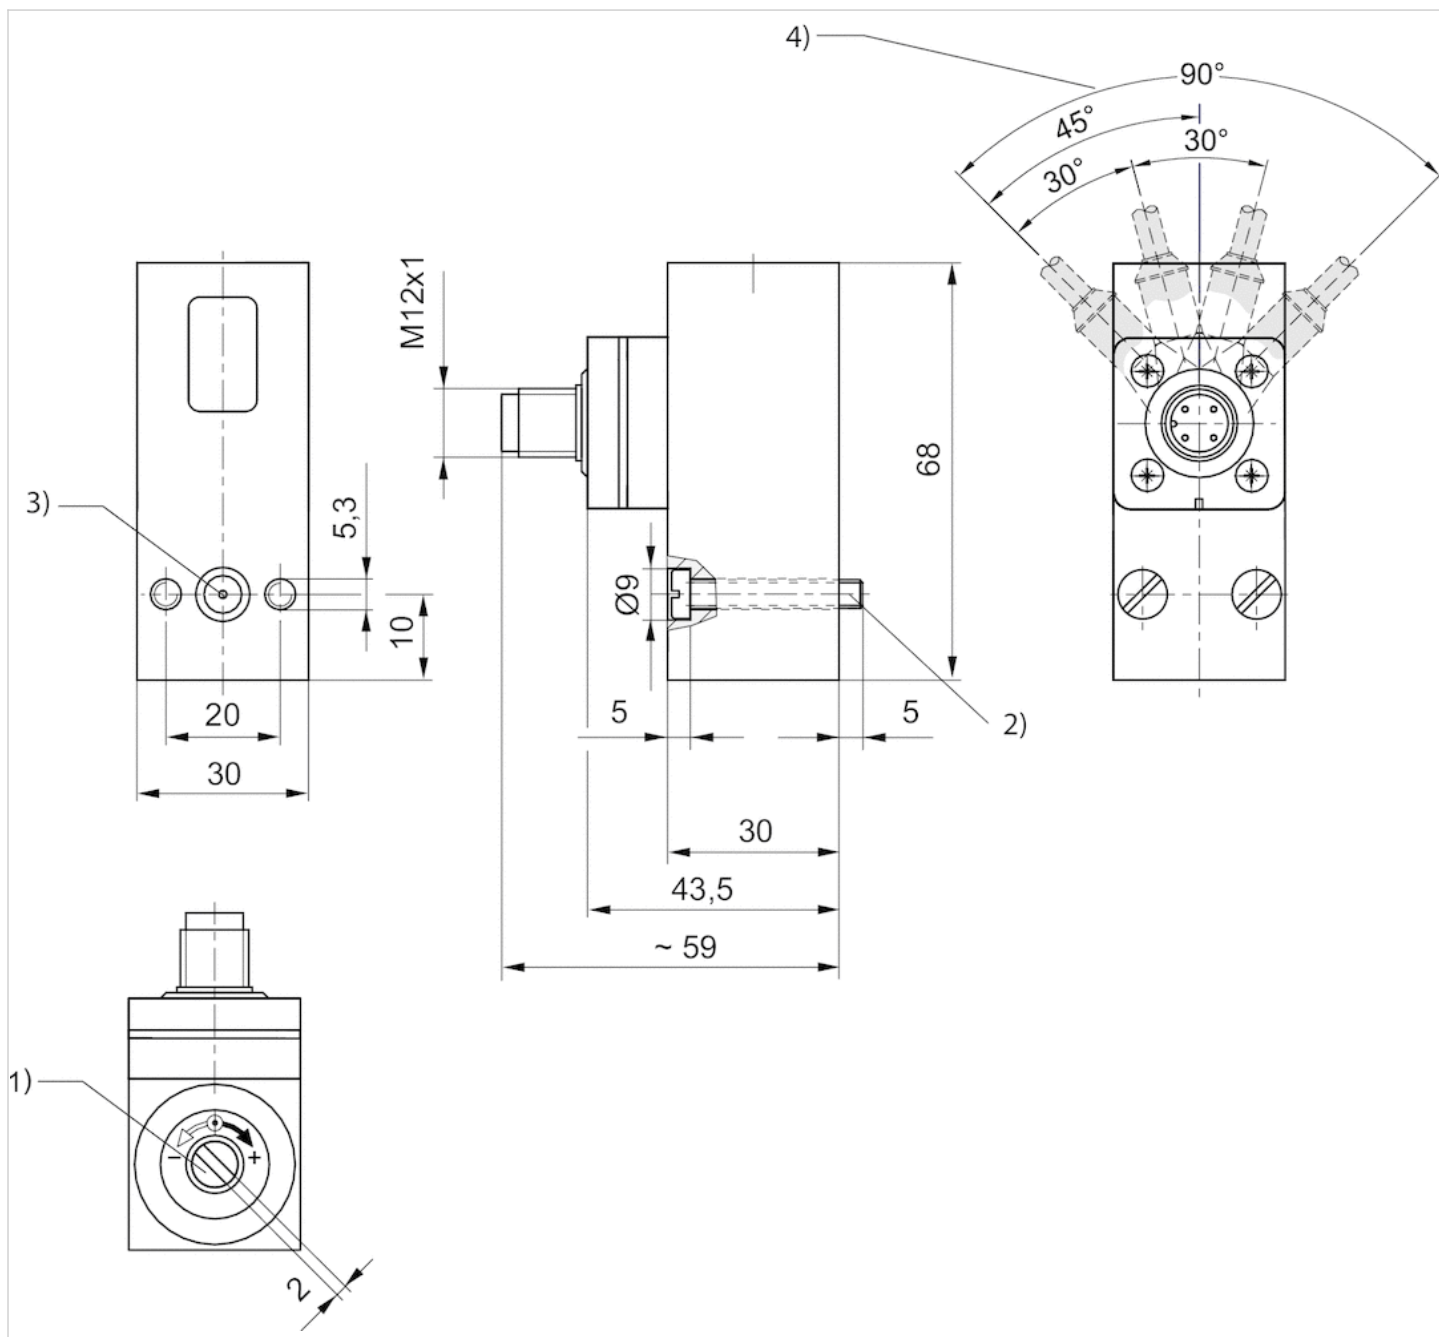


- 1) Adjustment screw, self-holding
- 2) cylinder screw M5x30 (included in scope of delivery)
- 3) O-ring Ø5x1,5 (included)
- 4) Detent position

Diagrams

differential switching pressure characteristic curve (-0,9 - 0 bar)

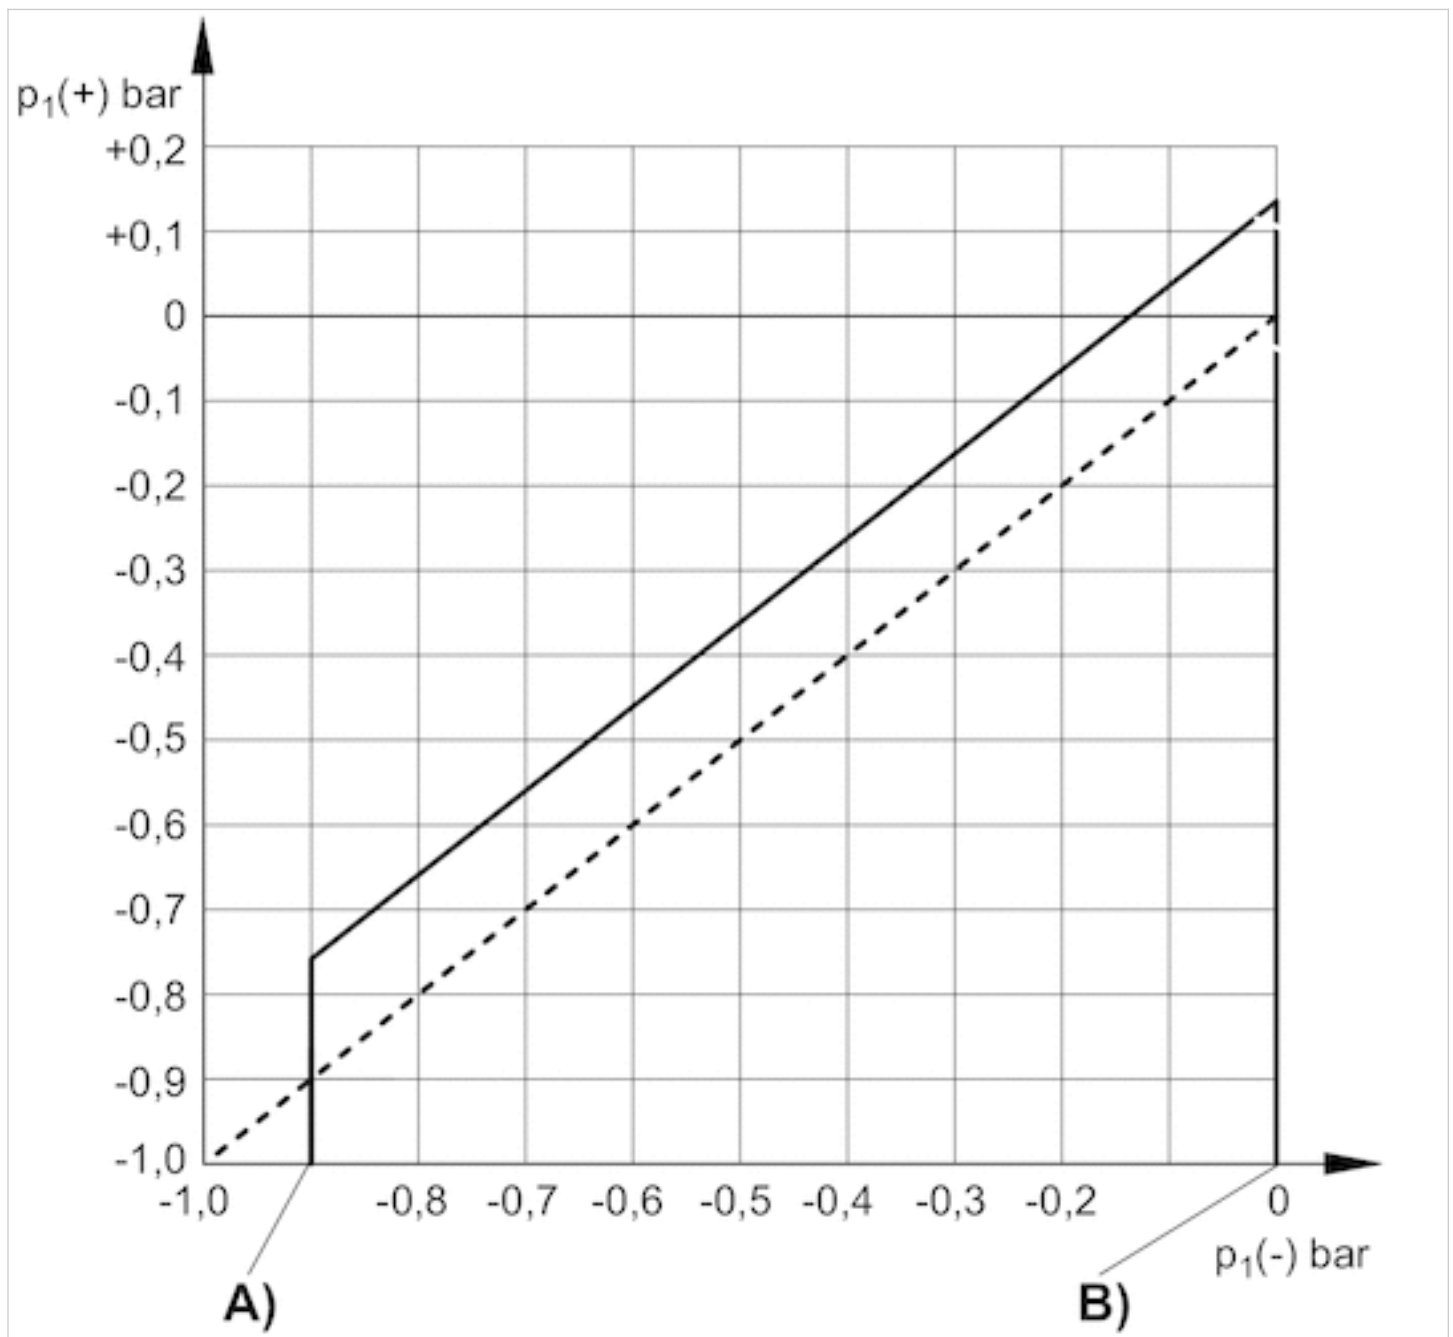A) $p_1(-)$, min.B) $p_1(-)$, max. $p_1(+)$ = upper switching pressure with increasing pressure $p_1(-)$ = lower switching pressure with decreasing pressure

differential switching pressure characteristic curve (0,2 - 16 bar)

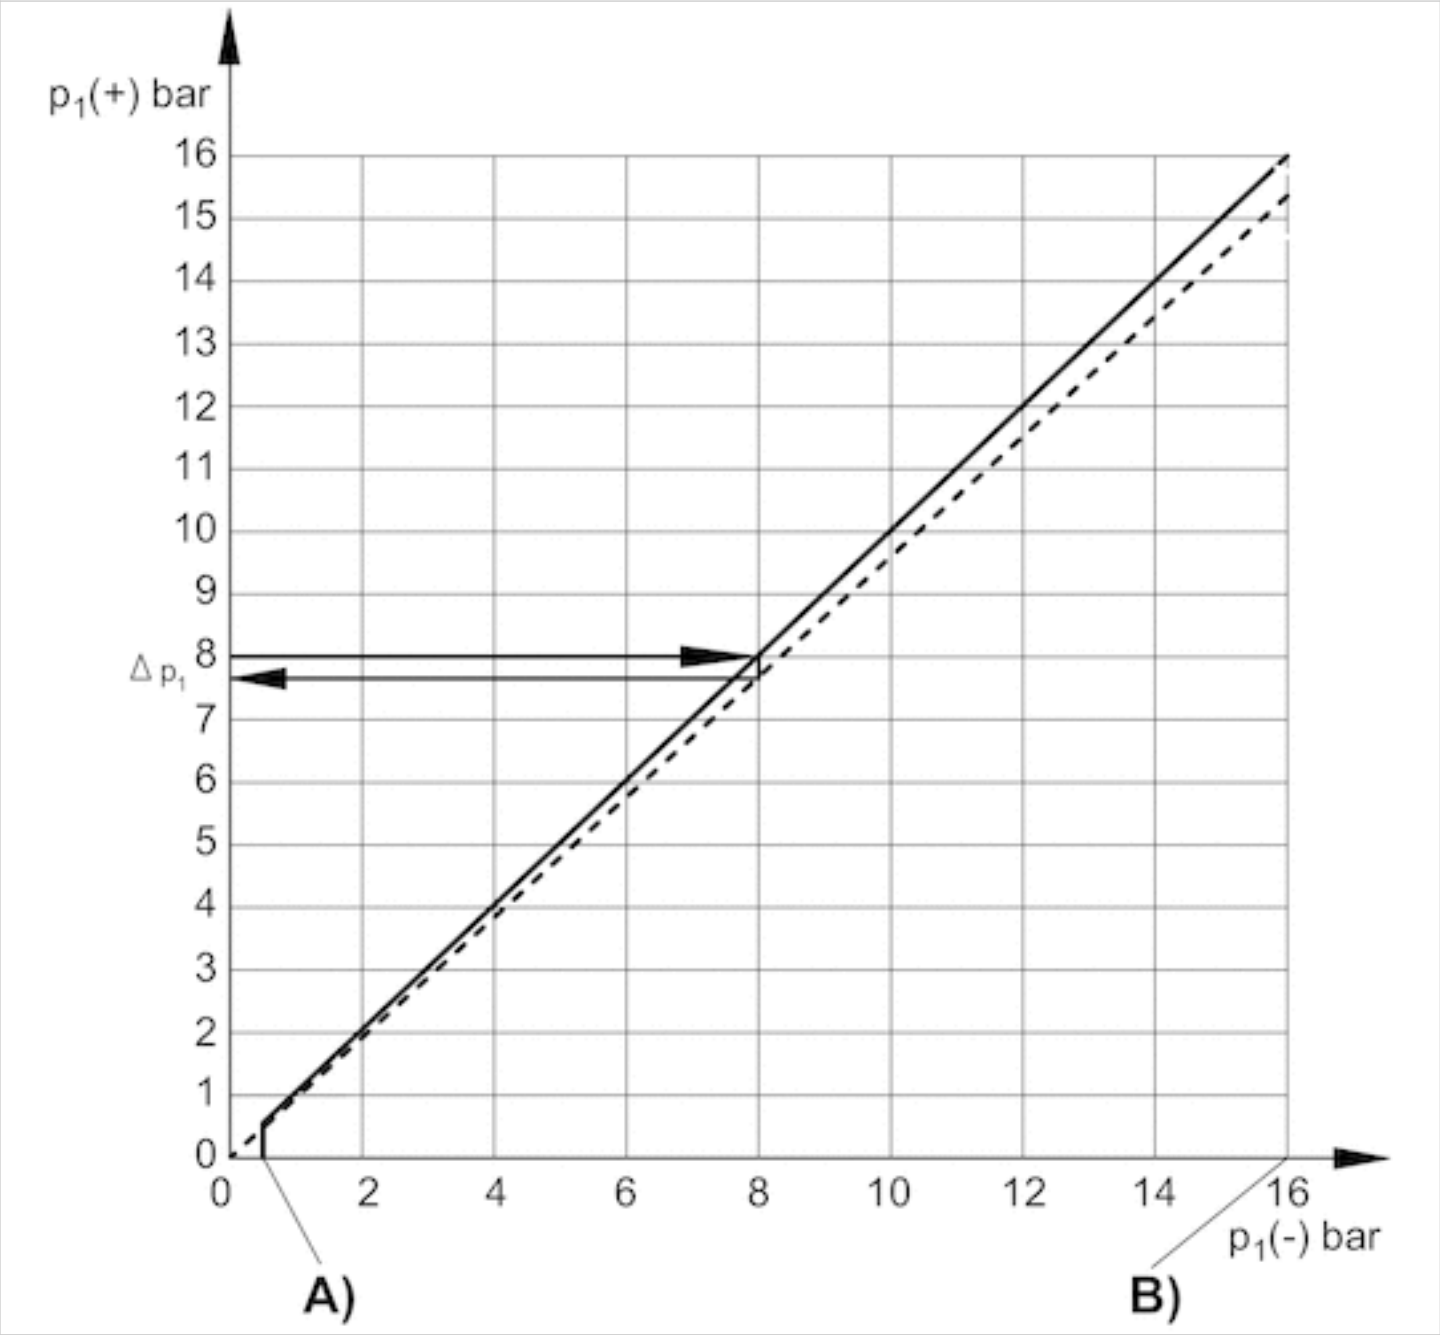

A) $p_1(-)$, min.
B) $p_1(-)$, max.
 $p_1(+)$ = upper switching pressure with increasing pressure
 $p_1(-)$ = lower switching pressure with decreasing pressure
 Δp_1 = max. operating pressure difference or hysteresis
Example:
 $p_1(+)$ = 8 bar > $p_1(-)$ = 7.6 bar
 Δp_1 = 0.4 bar

max. permissible continuous current I_{max} [A] with ohmic load

U [V]	I [A] 1)	I [A] 2)
30-250	3A	
30 / 48 / 60 / 125		3 / 1,2 / 0,8 / 0,4

reference cycle: 30/min., reference temperature: + 30 °C

1) AC

2) DC

max. permissible continuous current I max. [A] with inductive load

U [V]	I [A] 1) 3)	I [A] 2) 4)
30-250	3A	
30 / 48 / 60 / 125		2 / 0,55 / 0,4 / 0,2

reference cycle: 30/min., reference temperature: + 30 °C

1) AC


2) DC

3) $\cos \approx 0,7^\circ$

4) L/R ≈ 10 ms

Pin assignments

Pin assignments

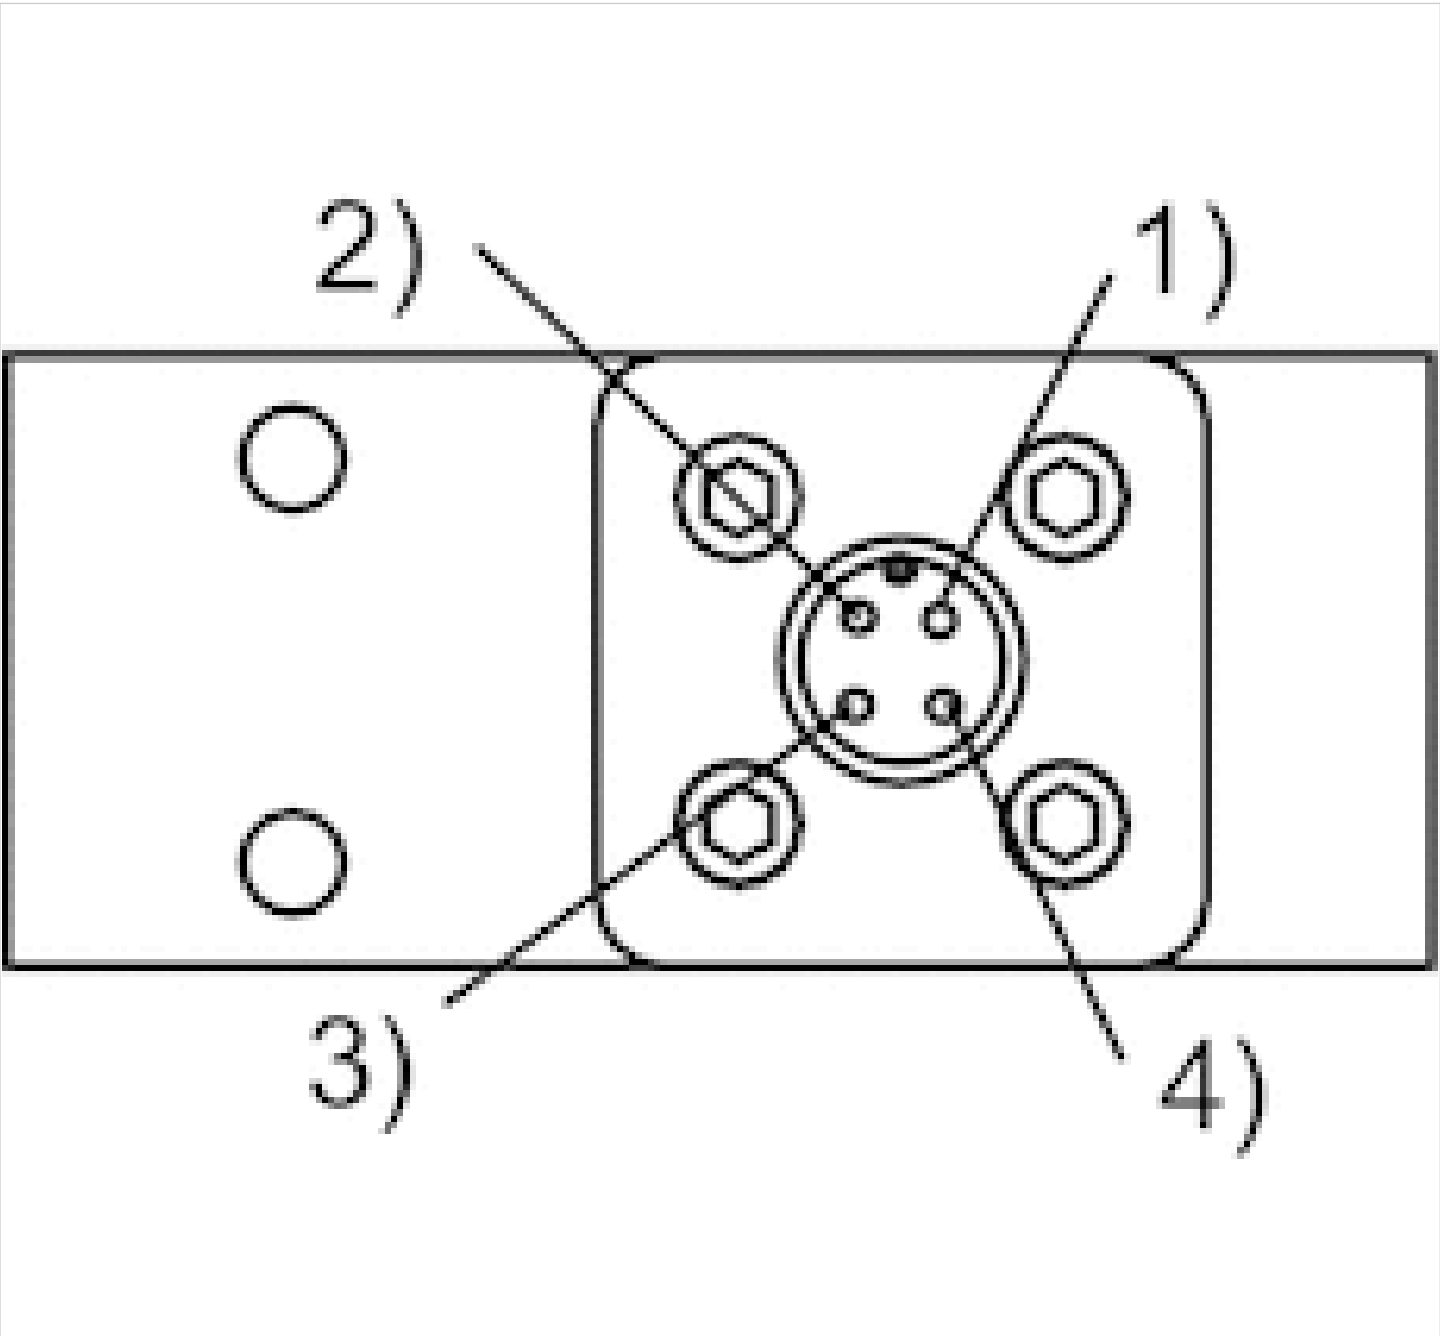

Pin	1	2	3	4
Allocation	+UB	break contact	No function	NO (make contact)

Efficient pneumatic solutions, our program: cylinders and drives, valves and valve systems, air supply management



Visit us: [Emerson.com/Aventics](https://www.emerson.com/Aventics)

Your local contact: [Emerson.com/contactus](https://www.emerson.com/contactus)



Emerson.com



Facebook.com/EmersonAutomationSolutions



LinkedIn.com/company/Emerson-Automation-Solutions



Twitter.com/EMR_Automation

An example configuration is depicted on the title page. The delivered product may thus vary from that in the illustration. Subject to change. This Document, as well as the data, specifications and other information set forth in it, are the exclusive property of AVENTICS GmbH. It may not be reproduced or given to third parties without its consent. Only use the AVENTICS products shown in industrial applications. Read the product documentation completely and carefully before using the product. Observe the applicable regulations and laws of the respective country. When integrating the product into applications, note the system manufacturer's specifications for safe use of the product. The data specified only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgement and verification. It must be remembered that the products are subject to a natural process of wear and aging.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Brand logotype are registered trademarks of one of the Emerson family of companies. All other marks are the property of their respective owners. © 2020 Emerson Electric Co. All rights reserved.
2020-12



CONSIDER IT SOLVED™