


Series Configuration

Product	Model	Port size					INDEX
		1/8	1/4	3/8	1/2	3/4	
Air Filter	AF						P.28
	AF20-A	●	●				
	AF30-A		●	●			
	AF40-A		●	●	●		
	AF40-06-A					●	
Mist Separator	AFM						P.28
	AFM20-A	●	●				
	AFM30-A		●	●			
	AFM40-A		●	●	●		
	AFM40-06-A					●	
Micro Mist Separator	AFD						P.28
	AFD20-A	●	●				
	AFD30-A		●	●			
	AFD40-A		●	●	●		
	AFD40-06-A					●	
Regulator	AR						P.44
	AR20-A	●	●				
	AR25-A		●	●			
	AR30-A		●	●			
	AR40-A		●	●	●		
	AR40-06-A					●	

JIS Symbol



How to Order


AC **30** **B** - **03** **DG** - - **A**

① ② ③ ④ ⑤ ⑥

- Option/Semi-standard: Select one each for a to j.
- Option/Attachment/Semi-standard symbol: When more than one specification is required, indicate in alphanumeric order.
Example) AC30B-F03DM-SV-1NR-A

		Symbol	Description	1				
				Body size				
				20	25	30	40	
2	Thread type	Nil	Rc	●	●	●	●	
		N	NPT	●	●	●	●	
		F	G	●	●	●	●	
+								
3	Port size	01	1/8	●	—	—	—	
		02	1/4	●	●	●	●	
		03	3/8	—	●	●	●	
		04	1/2	—	—	—	●	
		06	3/4	—	—	—	●	
+								
4	Option a	Float type auto drain	Nil	Without auto drain	●	●	●	●
		C Note 2)	N.C. (Normal close)	Drain port is closed when pressure is not applied.	●	●	●	●
		D Note 3)	N.O. (Normal open)	Drain port is open when pressure is not applied.	—	●	●	●
+								
	b	Pressure gauge Note 4)	Nil	Without pressure gauge	●	●	●	●
		G	Round type pressure gauge (with limit indicator)	●	●	●	●	
		M	Round type pressure gauge (with color zone)	●	●	●	●	
+								
5	Attachment c	Pressure switch	Nil	Without attachment	●	●	●	●
		S Note 5)	Mounting position: AF+S+AR	●	●	●	●	
		T-shaped spacer	T Note 5)	Mounting position: AF+T+AR	●	●	●	●
+								
	d	3-port valve for residual pressure release	Nil	Without attachment	●	●	●	●
		V	Mounting position: AF+AR+V	●	●	●	●	
		V1 Note 6)	Mounting position: V+AF+AR	●	●	●	●	
+								
6	e	Set pressure Note 7)	Nil	0.05 to 0.7 MPa setting	●	●	●	●
		1	0.02 to 0.2 MPa setting	●	●	●	●	
	+							
	f	Bowl	Nil	Polycarbonate bowl	●	●	●	●
		C	With bowl guard	●	—	—	—	
+								
	g	Filter drain port	Nil	With drain cock	●	●	●	●
		J Note 8)	Drain guide 1/8	●	—	—	—	
			Drain guide 1/4	—	●	●	●	
		W	Drain cock with barb fitting (for ø6 x ø4 nylon tube)	—	●	●	●	

Air Combination *Series AC20B-A to AC40B-A*

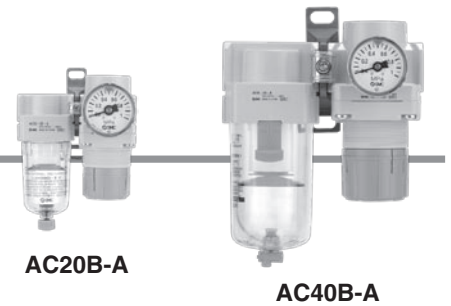

		Symbol	Description	①						
				Body size						
				20	25	30	40			
⑥	Semi-standard	h	Exhaust mechanism	Nil	Relieving type		●	●	●	●
				N	Non-relieving type		●	●	●	●
					+					
		i	Flow direction	Nil	Flow direction: Left to right		●	●	●	●
				R	Flow direction: Right to left		●	●	●	●
				+						
	j	Pressure unit	Nil	Name plate and pressure gauge in imperial units: MPa		●	●	●	●	
			Z Note 9)	Name plate, caution plate for bowl, and pressure gauge in imperial units: psi, °F		○ Note 10)	○ Note 10)	○ Note 10)	○ Note 10)	

Note 1) Option G, M are not assembled and supplied loose at the time of shipment.

Note 2) When pressure is not applied, condensate which does not start the auto drain mechanism will be left in the bowl. Releasing the residual condensate before ending operations for the day is recommended.

Note 3) If the compressor is small (0.75 kW, discharge flow is less than 100 L/min[ANR]), air leakage from the drain cock may occur during start of operations. N.C. type is recommended.

Note 4) When the pressure gauge is attached, a 1.0 MPa pressure gauge will be fitted for standard (0.7 MPa) type. 0.4 MPa pressure gauge for 0.2 MPa type.

Note 5) The bracket position varies depending on the T-shaped spacer or pressure switch mounting.

Note 6) Make sure that the outlet pressure is released to atmospheric pressure using a pressure gauge.

Note 7) Pressure can be set higher than the specification pressure in some cases, but use pressure within the specification range.

Note 8) Without a valve function.

Note 9) For thread type: NPT. This product is for overseas use only according to the new Measurement Law. (The SI unit type is provided for use in Japan.) MPa and psi are shown together on the pressure unit.

Round pressure gauge (with color zone): Cannot be used with M. Available by request for special.

Note 10) ○: For thread type: NPT only.

Standard Specifications

Model		AC20B-A	AC25B-A	AC30B-A	AC40B-A	AC40B-06-A
Component	Air filter	AF20-A	AF30-A	AF30-A	AF40-A	AF40-06-A
	Regulator	AR20-A	AR25-A	AR30-A	AR40-A	AR40-06-A
Port size		1/8, 1/4	1/4, 3/8	1/4, 3/8	1/4, 3/8, 1/2	3/4
Pressure gauge port size		1/8				
Fluid		Air				
Ambient and fluid temperature		– 5 to 60°C (with no freezing)				
Proof pressure		1.5 MPa				
Maximum operating pressure		1.0 MPa				
Set pressure range		0.05 to 0.7 MPa				
Nominal filtration rating		5 μm				
Bowl material		Polycarbonate				
Bowl guard		Semi-standard (Steel)	Standard (Polycarbonate)			
Regulator construction		Relieving type				
Weight (kg)		0.27	0.42	0.57	0.79	0.90