

Technical Data Sheet

HTD Timing Belt


8M Profile

Dimensions

Pitch Length	8 mm
Teeth Height (h)	3.38 mm $\pm$ 0.20
Belt Height (T)	6.0 mm $\pm$ 0.40

Construction & Materials

1	CR Rubber
2	Fibreglass Tensile cord
3	Nylon tooth facing

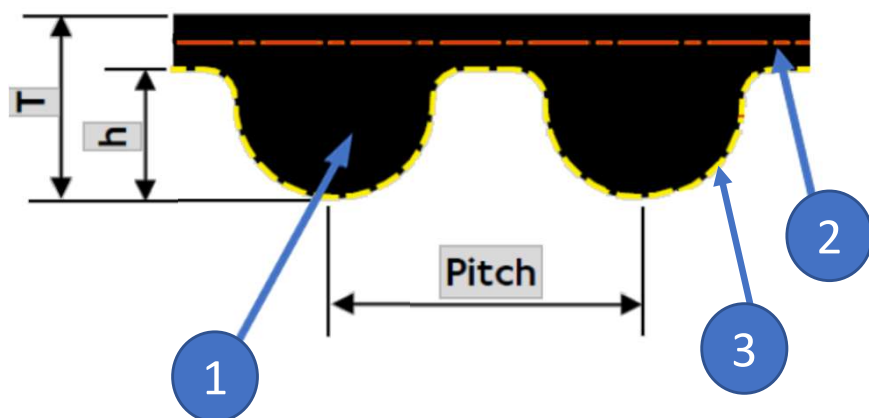

Labelling

	DO NOT CRIMP	960-8M	HTD TIMING BELT	894879		1523	N15C110924 001
	DO NOT CRIMP	960-8M	HTD TIMING BELT	894879		1523	N15C110924 002
	DO NOT CRIMP	960-8M	HTD TIMING BELT	894879		1523	N15C110924 003
	DO NOT CRIMP	960-8M	HTD TIMING BELT	894879		1523	N15C110924 004
	DO NOT CRIMP	960-8M	HTD TIMING BELT	894879		1523	N15C110924 005

Length & Profile

Production Date

Standards & Specifications

- Conforms to ISO 13050 Standard
- Hardness 80 $\pm$ 5 SHA°
- Temperature Range -20 ~ +100°C
- Conditionally Oil resistant

Range

Standard belts lengths from :

288m – 3600mm

Standard belt widths:

20mm / 30mm / 50mm / 85mm