



M8 Female Individual Connectors with Flying Lead Cable (For Solenoid Pilots)



With LED Voltage Surge Protection and Flying Lead Cable IP67 Protected		Weight (oz)	Order Code
	2 m Cable	2.19	P8LS08L226C
	5 m Cable	5.47	P8LS08L526C
	9 m Cable	9.88	P8LS08L926C

Pneumatic Connectors for Size 2 Modules



PMDYY2



MMDVA2



HMDXX2



FMD09-2




CMD13-2



P2M1K0TASD



P2M2HXT01

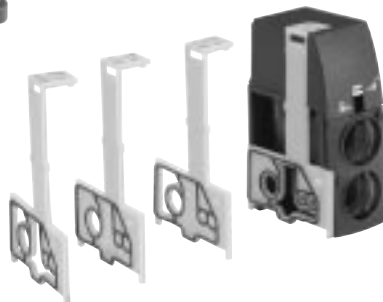

P2M2BXT0A

		Elbow Version		Straight Version	
		Weight (oz)	Order Code	Weight (oz)	Order Code
Tube Push-in Connector	6mm OD	0.18	CMD06-2	0.11	FMD06-2
	1/4" OD	0.18	CMD07-2B	0.11	FMD07-2B
	8mm OD	0.21	CMD08-2	0.14	FMD08-2
	3/8" OD	0.21	CMD09-2B	0.14	FMD09-2B
	10mm OD	0.25	CMD10-2	0.18	FMD10-2
	12mm OD	0.28	CMD12-2	0.21	FMD12-2
	1/2" OD	—	—	0.21	FMD13-2B
Muffler for Exhaust Port	—	—	—	0.11	MMDVA2
Plug	—	—	—	0.18	PMDYY2
Double Male Union (For Peripheral Valve Modules)	—	—	—	0.28	HMDXX2

Note: 85 Durometer minimum for pneumatic connectors.

Island Modules

Module	Weight (oz)	Order Code
Pneumatic Head and Tail Set	2.26	P2M2HXT01*
Pneumatic Head and Tail Set with TORX Screwdriver	2.50	P2M2HXT0T*
TORX Screwdriver Only	.24	P2M1K0TAFD
Intermediate Supply Module (With a set of 4 Configuration Plates)	1.48	P2M2BXT0A*

* Use Fittings for Size 2 Modules Only.