




Technical data

21322KD1

Double row spherical roller bearings

Spherical roller bearing, one-piece machined cage, groove and lubrication holes on outer ring, tapered bore 1:12

Visual(s)

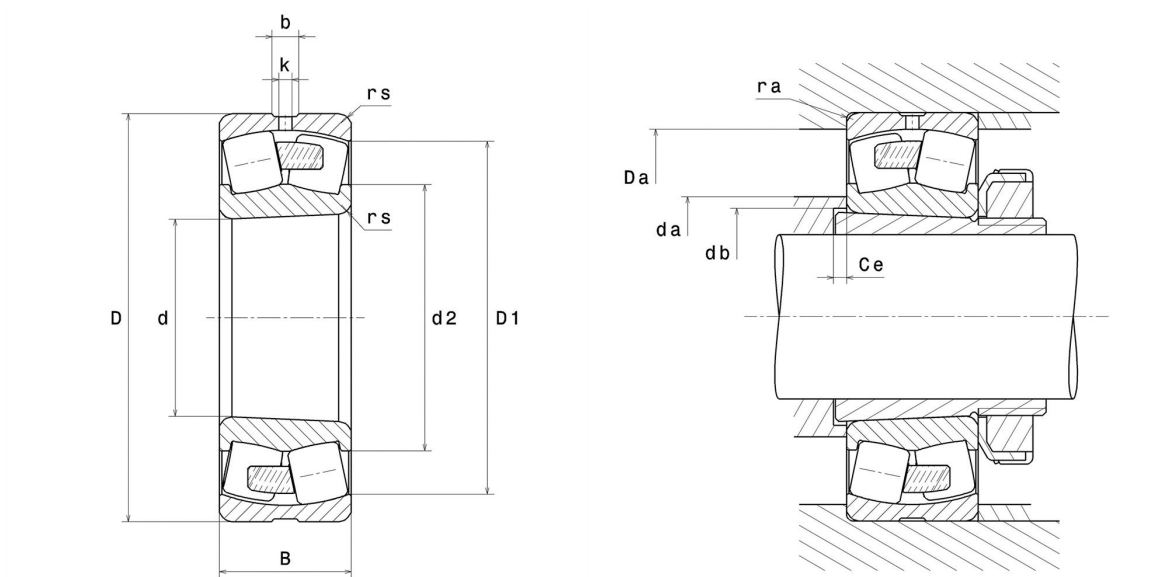

Product definition

d	110 mm
D	240 mm
B	50 mm
d2	150.2 mm
D1	202.7 mm
rs min	3 mm
Number of lubrication holes	4
b	9 mm
k	5 mm
Associated sleeve reference	H322
e	0.21
Y1	3.2
Y2	4.77
Y0	3.13
Radial clearance class	CN
Brand	NTN

Product performance

Dynamic load, C	495 kN
Static load, C0	615 kN
Fatigue limit load, Cu	116 kN
Nref	0 Tr/min
Nlim	0 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.83 Hz
Characteristic outer ring frequency, BPF0	6.68 Hz
Characteristic inner ring frequency, BPFI	9.32 Hz

Abutment dimensions

da min	124 mm
db min	118 mm
Ce min	9 mm
Da max	226 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X ₀	Y ₀
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .