


Centre trunnion - H

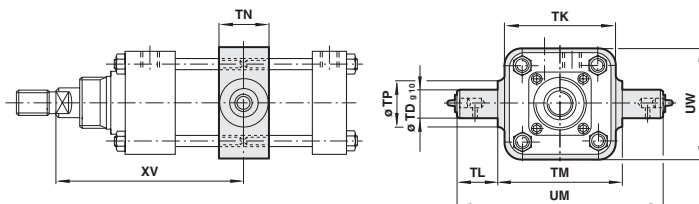


Stroke

MODELS	Ø inch	Ø TD _{g10}	TK	TL	TM	TN	Ø TP	UM	UW	XV min	XV max	Weight
M/P14001	1 1/4	12	45	17,5	50,5	20,5	18	85,5	45	72,5	93	0,16 kg
M/P11224	1 3/4	16	65	24	73	25,5	22	120,5	65	79	94,5	0,50 kg
M/P8635	2	18	70	25,5	79,5	32	29	130	70	90,5	97	0,60 kg
M/P8636	2 1/2	22	81	32	90,5	38	35	154	81	102	108,5	0,90 kg
M/P8637	3	25	95	38	108	38	38	184	95	111,5	125,5	1,25 kg
M/P8638	4	32	127	41,5	139,5	44,5	44,5	222,5	127	121,5	130	2,50 kg
M/P8639	5	38	152	51	165	51	51	266,5	152	149,5	162	3,50 kg
M/P8640	6	38	187	51	192	51	51	293,5	187	149,5	168,5	5,00 kg
M/P8645	8	45	241,5	54	247,5	70	64	355,5	245	173	189	10,00 kg
M/P8667	10	65	330	76	330	76	114	482,5	318	207	245	25,00 kg
M/P8670	12	75	381	76	381	89	127	533,5	368	213,5	238,5	35,00 kg
M/P11819	14	90	457	101,5	457	101,5	140	660,5	432	239	255,5	51,50 kg

Note: These mountings are only supplied assembled complete with the cylinder.
Unless otherwise specified, units will be supplied with dimension 'XV' plus half the stroke length. Grease nipple supplied as standard on cylinders 9175 to 9140.


Centre trunnion - UH

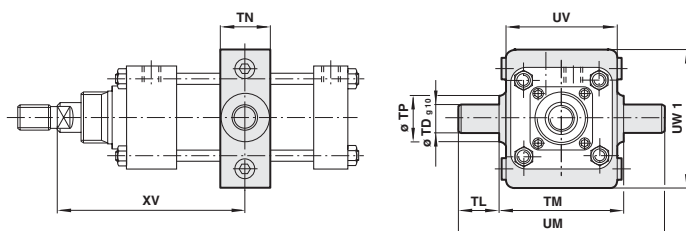

MODELS	Ø TD _{g10}	Ø TP	TL	TM	TN	UM	UV	UW 1	XV min	XV max	Torque Nm	Weight
QM/9125/40	12	18	17,5	50,5	20,5	85,5	45	60	72,5	93	4	0,24 kg
QM/9175/40	16	22	24	73	25,5	120,5	57	74	79	94,5	8	0,43 kg
QM/920/40	18	29	25,5	79,5	32	130	70	87	90,5	97	8	0,70 kg
QM/925/40	22	35	32	90,5	38	154	81	95	102	108,5	8	1,14 kg
QM/930/40	25	38	38	108	38	184	95	110	111,5	125,5	10	1,30 kg
QM/940/40	32	44,5	41,5	139,5	44,5	222,5	127	131	121,5	130	10	2,32 kg

Note: It is most important that the locking screws which secure the mounting to the tie rods are tightened to the torque figures shown in the above table. For maximum energy input, consult our Technical Service.

Piston rod clevis - F

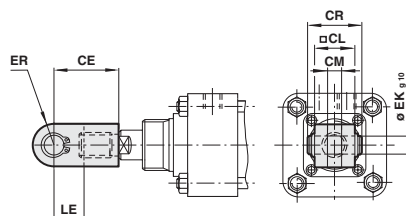

MODELS	Ø inch	CE	CL	CM	CR	Ø EK _{g10}	ER	LE	Weight
QM/402	1 1/4	25,5	12,5	6,4	18	6	6,5	11	0,03 kg
QM/404	1 3/4	33,5	19	10	26	10	10	12,5	0,05 kg
QM/405	2	41,5	25,5	11	33	12	13	19	0,10 kg
QM/407	2 1/2	58,5	38	14	47	16	19	25,5	0,40 kg
QM/407	3	58,5	38	14	47	16	19	25,5	0,40 kg
QM/408	4	66,5	44,5	16	53	18	22	28,5	0,90 kg
QM/409	5	79,5	51	20	60	22	25	32	1,25 kg
QM/409	6	79,5	51	20	60	22	25	32	1,25 kg
QM/410	8	95,5	63,5	25	74	25	32	38	1,70 kg
QM/411	10	120,5	76	32	87	32	38	44,5	2,75 kg
QM/411	12	120,5	76	32	87	32	38	44,5	2,75 kg
QM/411	14	120,5	76	32	87	32	38	44,5	4,50 kg