



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKT216 - HE2316, UKT 200 Take-Up Mounted Bearings - Adapter Sleeve Locking

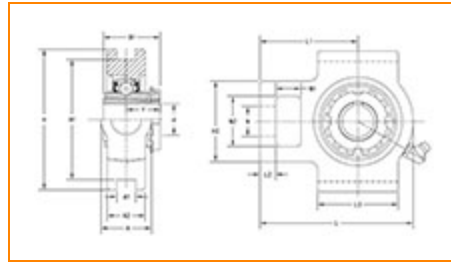

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK216 - HE2316
Adapter Sleeve Number¹	HE2316
Locking Style	Adapter Sleeve Locking
Housing Construction	Take-Up

Dimensions

Housing Width A	70 mm
Slot Width A1	26 mm
Socket Width A2	51 mm
Total Height H	184 mm





Pitch Height H1	165 mm
Height H2	111 mm
Total Length L	235 mm
Shaft Length L1	140 mm
Dimension L2	21 mm
Slot Length L3	121 mm
Adjustment Screw Bore N	41 mm
Opening Width N1	32 mm
Opening Height N2	70 mm
Center of Bearing from End Y	44.5 mm
Dimension B1	78 mm
Grease Nipple Size	B-R1/8

Basic Load Ratings

Static Load Rating	53000 N
Dynamic Load Rating	72700 N

¹ Purchase the Adapter Sleeve separately

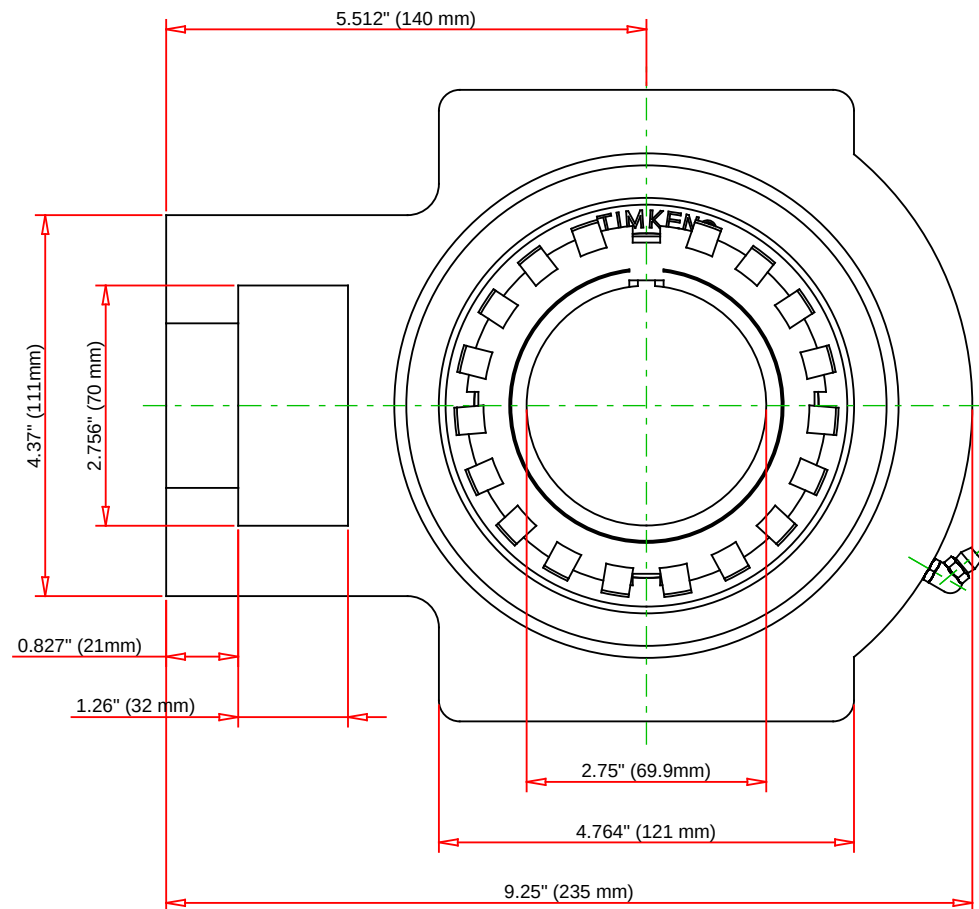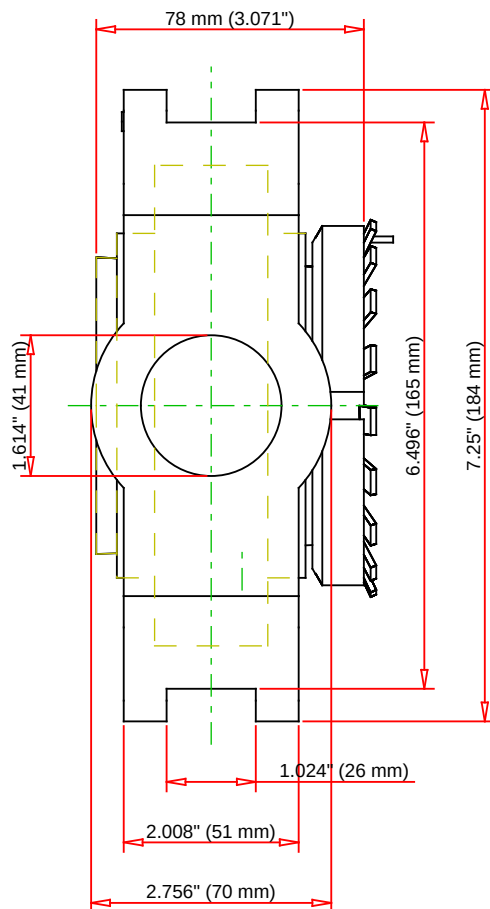

Note: Adapter sold separately

Bearing Number	UK216 - HE2316			
Load Ratings - C _r	16344	lbf	72700	N
Load Ratings - C _{0r}	11915	lbf	53000	N
Weight	18.7	lb	8.5	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKT216 - HE2316
UKT 200 Take-Up Mounted Bearings -
Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY