


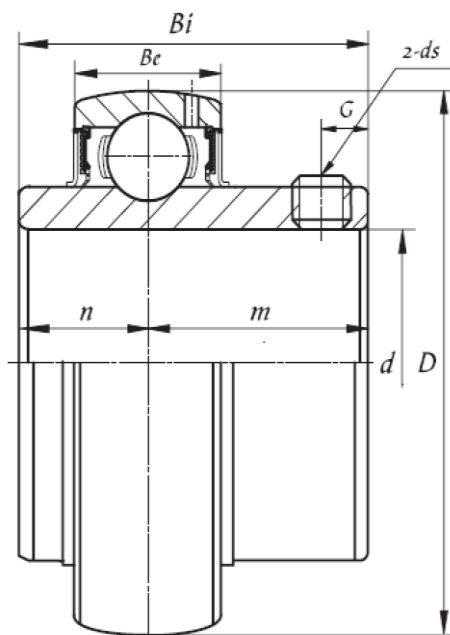

P/N	Dimensions (mm)								Basic Load Ratings		Weight (Kg)
									Dynamic Cr	Static Cor	
	d	D	Bi	Be	n	m	G	ds	(KN)		
UC201	12	47	31	16	12.7	18.3	5	M6×1.0	12.80	6.60	0.2
UC202	15	47	31	16	12.7	18.3	5	M6×1.0	12.80	6.60	0.18
UC203	17	47	31	16	12.7	18.3	5	M6×1.0	12.80	6.60	0.17
UC204	20	47	31	16	12.7	18.3	5	M6×1.0	12.80	6.60	0.15
UC205	25	52	34.1	17	14.3	19.8	5	M6×1.0	14.00	7.85	0.19
UC206	30	62	38.1	19	15.9	22.2	5	M6×1.0	19.45	11.25	0.30
UC207	35	72	42.9	20	17.5	25.4	7	M8×1.0	25.70	15.20	0.45
UC208	40	80	49.2	21	19	30.2	8	M8×1.0	19.50	18.10	0.59
UC209	45	85	49.2	22	19	30.2	8	M8×1.0	32.70	20.90	0.65
UC210	50	90	51.6	23	19	32.6	9	M10×1.25	35.00	23.20	0.76
UC211	55	100	55.6	25	22.2	33.4	9	M10×1.25	43.30	29.20	0.97
UC212	60	110	65.1	27	25.4	39.7	10.5	M10×1.25	47.70	32.80	1.38
UC213	65	120	65.1	28	25.4	39.7	12	M10×1.25	57.20	40.00	1.68
UC214	70	125	74.6	29	30.2	44.4	12	M12×1.5	62.10	44.80	1.97
UC215	75	130	77.8	30	33.3	44.5	12	M12×1.5	66.20	49.30	2.09
UC216	80	140	82.6	33	33.3	49.3	14	M12×1.5	72.60	53.30	2.62
UC217	85	150	85.7	35	34.1	51.6	14	M12×1.5	83.30	63.70	3.47
UC218	90	160	96	37	39.7	56.3	14	M12×1.5	96.00	71.10	4.13
UC220	100	180	108	40	42	66	16	M16×1.5	122.00	92.80	6.58