


3-bolt bracket flanged ball bearing units, set screws, for metric shafts

d 20 – 45 mm

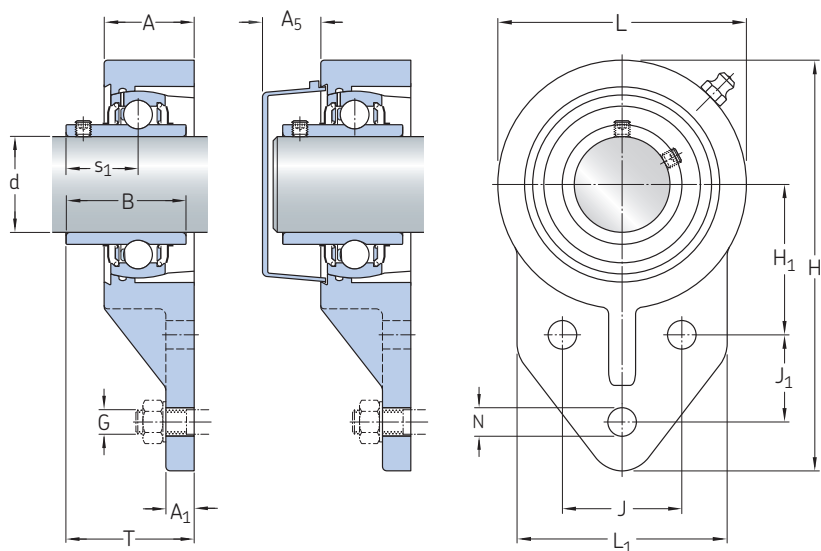

Principal dimensions	Basic load ratings		Fatigue load limit	Limiting speed with shaft tolerance h6	Mass	Designations		Appropriate end cover	Units
	dynamic	static				Housing	Bearings		
d	C	C ₀	P _u						
mm	kN			r/min	kg	–			
20	12,7	6,7	0,285	6 500	0,59	FB 204	UC 204	ECY 204	UCFB 204
25	14	7,8	0,335	5 850	0,72	FB 205	UC 205	ECY 205	UCFB 205
30	19,5	11,4	0,5	5 000	0,98	FB 206	UC 206	ECY 206	UCFB 206
35	25,5	15,3	0,7	4 300	1,29	FB 207	UC 207	ECY 207	UCFB 207
40	32,5	20,0	0,9	3 750	1,70	FB 208	UC 208	ECY 208	UCFB 208
45	32,5	20,4	0,9	3 400	1,99	FB 209	UC 209	ECY 209	UCFB 209