

Pneumatic connection technologies ► Fitting accessories

Double nipple

► external thread ► M5 - G 1 ► external thread ► M5 - G 1 ► FPT-S-RDO



00136365

Ambient temperature min./max.

-20 °C / +80 °C

Working pressure min./max.

0 bar / 16 bar

Materials:

Screw

Brass, nickel-plated

Housing

Brass, nickel-plated


Seal

Polyvinyl chloride, hard

Thread

Brass, nickel-plated

Dimensions

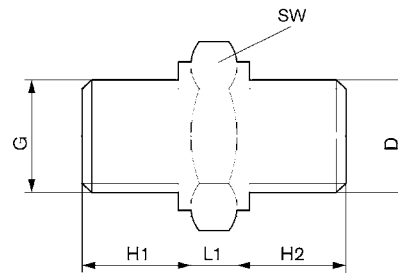

00107922

Part No.	Port D	Port G	H1	H2	L1	SW	Delivery quantity [Piece]					
1823391081	M5	M5	4.5	4.5	4	8	10					
1823391100	M5	G 1/8	7	5	5	13	10					
1823391015	G 1/8	G 1/8	7.5	7.5	4	14	10					
1823391016	G 1/8	G 1/4	10	7	5	17	10					
1823391017	G 1/4	G 1/4	10	10	5	17	10					
1823391018	G 1/4	G 3/8	10	10	5	22	10					
1823391019	G 3/8	G 3/8	10	10	5	22	10					
1823391020	G 3/8	G 1/2	12	10	6	27	5					
1823391029	G 1/2	G 1/2	12	12	6	27	5					
1823391286	G 1/2	G 3/4	12	12	7	32	2					
1823391287	G 3/4	G 3/4	12	12	7	32	2					
1823391288	G 3/4	G 1	15	12	8	41	2					
1823391289	G 1	G 1	15	15	8	41	2					