



The Timken Company


4500 Mt Pleasant St. NW

N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Bearing Unit - Adapter Sleeve UKT217 - HE2317, UKT 200 Take-Up Mounted Bearings - Adapter Sleeve Locking

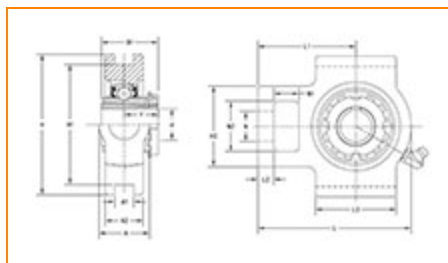

[Specifications](#) | [Dimensions](#) | [Basic Load Ratings](#)

Specifications

Bearing Unit - Adapter Sleeve	UK217 - HE2317
Adapter Sleeve Number¹	HE2317
Locking Style	Adapter Sleeve Locking
Housing Construction	Take-Up

Dimensions

Housing Width A	73 mm
Slot Width A1	30 mm
Socket Width A2	54 mm
Total Height H	198 mm





Pitch Height H1	173 mm
Height H2	124 mm
Total Length L	260 mm
Shaft Length L1	162 mm
Dimension L2	29 mm
Slot Length L3	157 mm
Adjustment Screw Bore N	48 mm
Opening Width N1	38 mm
Opening Height N2	73 mm
Center of Bearing from End Y	46.5 mm
Dimension B1	82 mm
Grease Nipple Size	B-R1/8

Basic Load Ratings

Static Load Rating	61900 N
Dynamic Load Rating	84000 N

¹ Purchase the Adapter Sleeve separately

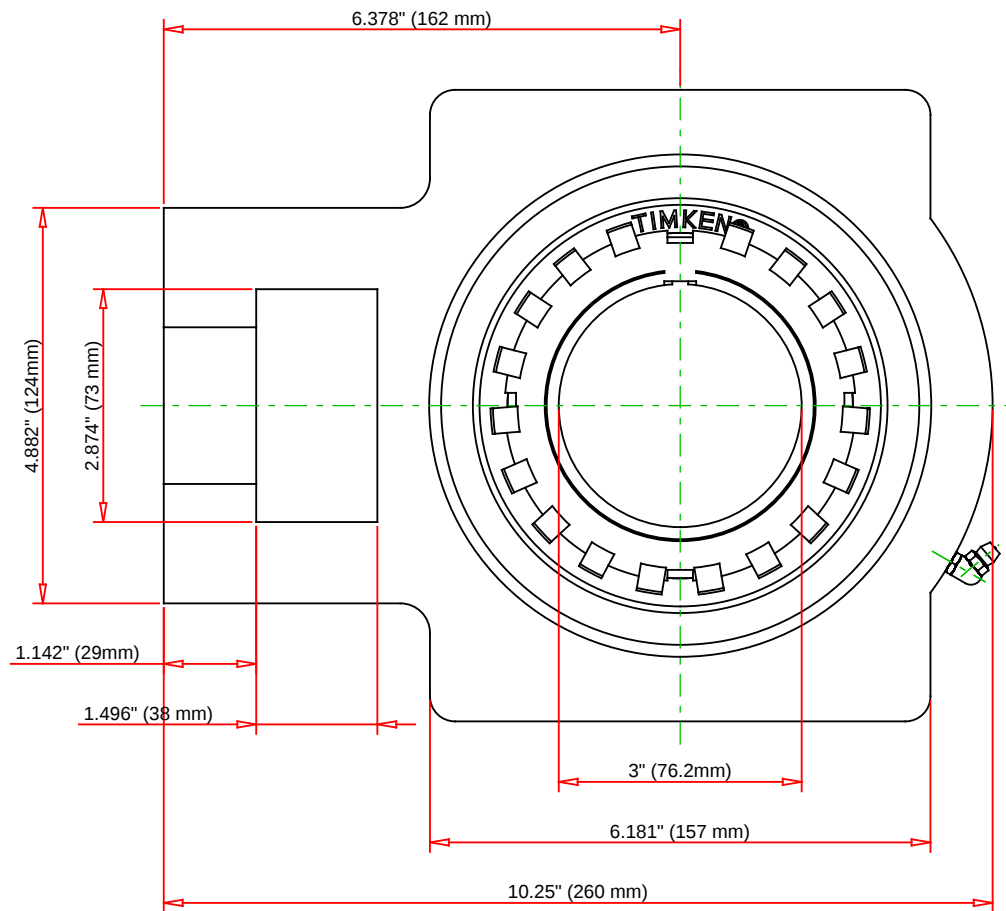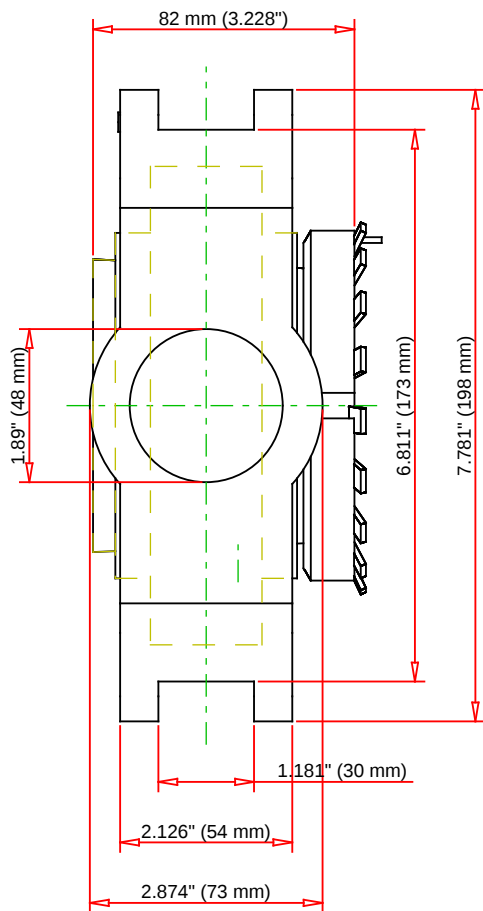

Note: Adapter sold separately

Bearing Number	UK217 - HE2317			
Load Ratings - C _r	18884	lbf	84000	N
Load Ratings - C _{0r}	13916	lbf	61900	N
Weight	24.7	lb	11.2	kg

TIMKEN

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

UKT217 - HE2317
UKT 200 Take-Up Mounted Bearings -
Adapter Sleeve Locking

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY