

Push-in Fittings, Metric, Series QR2-S

Straight Fitting, Reducing, QR2-S-RED



Ambient Temperature min./max.
Working pressure min./max

-20°C / +80°C
-0.95 bar / 16 bar

Materials:


Housing
Seal
Tooth lock washer
Release ring

Brass, nickel-plated
Acrylonitrile butadiene rubber
Stainless steel
Brass, nickel-plated

Technical Remarks

- The series QR1 (plastic) and QR2 (metal) can not be combined
- For further information about assembling and tolerances of compatible tubing, see the online section "Technical information".

Dimensions

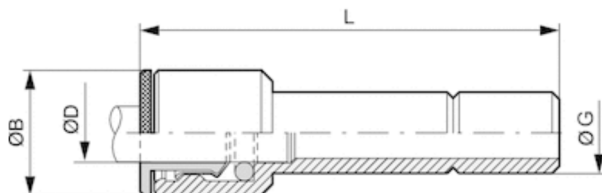

Part No.	Port G	Port D	Ø B	L	Delivery quantity [Piece]	Weight [kg]
1823391614	Ø 4	Ø 5	9	32.5	10	0.007
1823391615	Ø 4	Ø 6	9	28.5	10	0.008
1823391616	Ø 5	Ø 6	9.5	35.5	10	0.009
1823391617	Ø 4	Ø 8	9	31	10	0.011
1823391618	Ø 5	Ø 8	9.5	32.5	10	0.011
1823391619	Ø 6	Ø 8	10.5	33.5	10	0.012
1823391620	Ø 6	Ø 10	10.5	36.5	10	0.016
1823391621	Ø 8	Ø 10	13	38	10	0.018
1823391622	Ø 4	Ø 12	13	39.5	10	0.024
1823391623	Ø 6	Ø 12	13	39.5	10	0.022
1823391624	Ø 8	Ø 12	13	38.5	10	0.02
1823391903	Ø 10	Ø 12	15	41	5	0.019
1823391625	Ø 4	Ø 14	15	43	5	0.024
1823391626	Ø 6	Ø 14	15	43	5	0.023
1823391627	Ø 8	Ø 14	15	43	5	0.026
1823391842	Ø 10	Ø 14	15	43	10	0.03
1823391811	Ø 12	Ø 14	17	43	10	0.041
R412010190	Ø 14	Ø 16	20	47	5	0.039