



3/2-way solenoid valve Mod. A63



* choose the most suitable solenoid.

Equipped with a manual override for a steady operation, it is suitable to be mounted directly onto machine parts by two screws. The sealing is ensured by two concentric O-rings allowing the body a 360° adjustment.

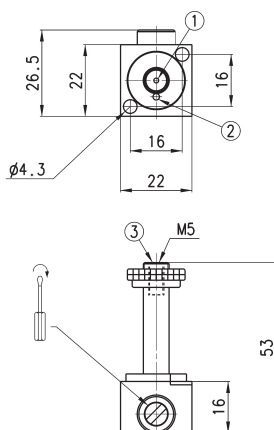

Mod.	Interface	Function	Orifice Ø (mm)	Qn (l/min)
A631-AC2-*	OR	3/2 NC	1,5	40



3/2-way solenoid valve Mod. A53



The body only is in technopolymer.

* choose the most suitable solenoid.

Equipped with a manual override for a steady operation, it is suitable to be mounted on Series 9 valves with an ISO interface. The interface which complies CNOMO norms is interchangeable with all ISO versions.

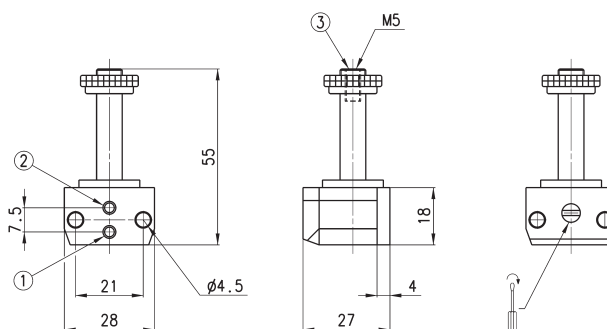

Mod.	Interface	Function	Orifice Ø (mm)	Qn (l/min)
A531-BC2-*	OR	3/2 NC	1,5	40