



IMAGE  
COMING SOON



PCJT20-XL-N-FA125


Flanged housing unit

Schaeffler ID:  
0096279100000

Housing units PCJT.-FA125, two-bolt  
flanged housing units, cast iron, eccentric  
locking collar, P seals, with anti-corrosion  
protection

X-life

Technical information

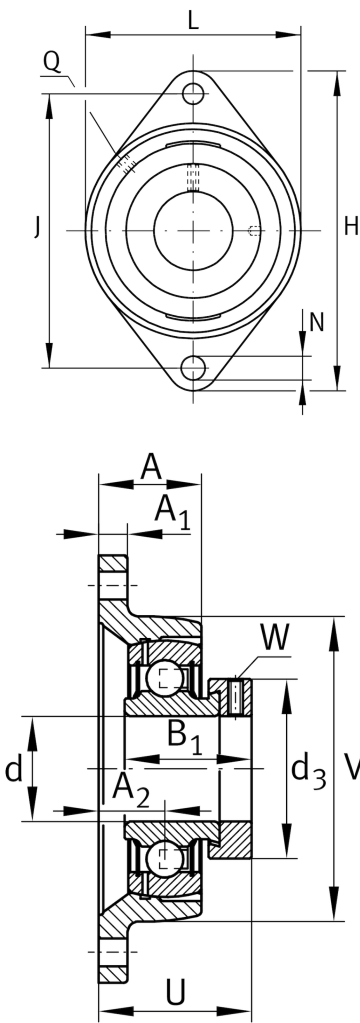

Main Dimensions & Performance Data

d	20.00 mm	Bore diameter
L	61.00 mm	Flange width
H	112.00 mm	Height flange
U	42.50 mm	Total height unit
C <sub>r</sub>	13,600.00 N	Basic dynamic load rating, radial
C <sub>0r</sub>	6,600.00 N	Basic static load rating, radial
C <sub>ur</sub>	345.00 N	Fatigue load limit, radial
	0.49 kg	Weight

Mounting dimensions

J	90.00 mm	Distance fixing bore
N	11.50 mm	Fixing bore
n	2.00	Number of screwing holes

Dimensions

A <sub>1</sub>	10.00 mm	Thickness of flange
A <sub>2</sub>	19.00 mm	Distance raceway
Q	M6	Connection thread lubrication
d <sub>3</sub>	33.00 mm	Outside diameter locking collar

Additional information

GRAE20-XL-NPP-B-	Bearing designation
FA125	
KASK04	Protecting cap